

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01N 30/18, 1/40		(11) International Publication Number: WO 98/41855
A1		(43) International Publication Date: 24 September 1998 (24.09.98)
(21) International Application Number: PCT/CA98/00235 (22) International Filing Date: 13 March 1998 (13.03.98) (30) Priority Data: 08/818,038 14 March 1997 (14.03.97) US (71)(72) Applicant and Inventor: PAWLISZYN, Janusz, B. [CA/CA]; 383 Dunvegan Drive, Waterloo, Ontario N2K 1W7 (CA). (74) Agent: SCHNURR, Daryl, W.; 18 Weber Street West, P.O. Box 2607, Kitchener, Ontario N2H 6N2 (CA).		(81) Designated States: AU, CA, JP, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: METHOD AND DEVICE FOR SOLID PHASE MICROEXTRACTION AND DESORPTION

(57) Abstract

A device for carrying out solid phase microextraction is a tubular member (40) having one closed end (44) and one open (42) end with an extracting surface (50) within said tubular member. The extracting surface (50) can be an extracting phase coating extending over a zone within the tubular member (40). The tubular member has a heater (52) that can be used for either or both drawing fluid carrier into the tubular member (40) or assisting in desorbing analytes into an injector of an analysis instrument. The tubular member (40) can also be mounted in a housing with an airtight cavity and a plunger. A method of operation of the device is also provided. Previously, samples were analyzed using liquid-liquid extraction or using cartridges. Both of these methods are relatively expensive and time consuming. Both of these methods also require the use of solvents which can be difficult and expensive to dispose of.

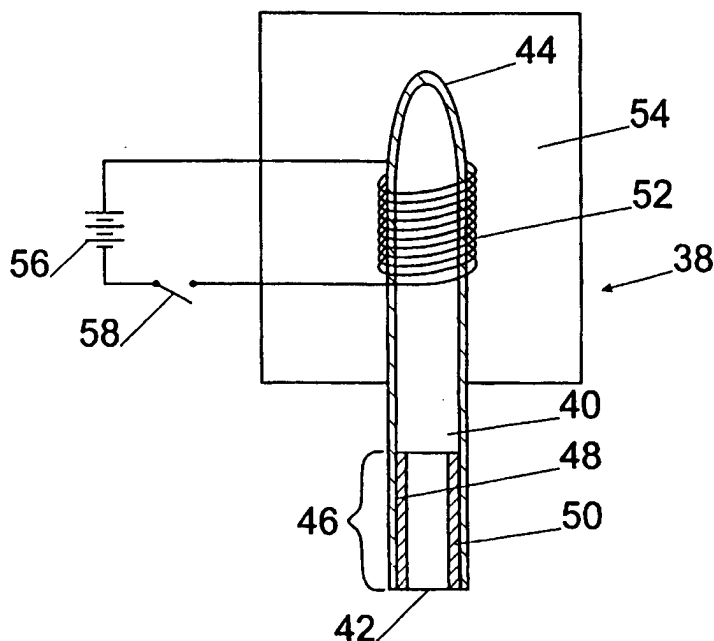

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

- 1 -

METHOD AND DEVICE FOR SOLID PHASE
MICROEXTRACTION AND DESORPTION

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

This invention relates to a method and device
5 for solid phase microextraction and analysis and
relates to microextraction and analysis being carried
out using various types of a fiber, both solid and
hollow, including a tubular member which can be made
from various materials or coated with various materials
10 or left uncoated.

DESCRIPTION OF THE PRIOR ART

Presently, in the organic analysis of
environmental samples which involve the separation of
components of interest from such matrices as soil,
15 water, fly ash, tissue or other material, liquid
extraction is traditionally used as the separation
process. For example, water samples are usually
extracted with organic solvent. Similarly, solid
samples are leached with an organic solvent in a
20 SOXHLET apparatus. Methods based on solvent extraction
are often time consuming, difficult to automate and are
very expensive since they require high purity organic
solvents and these organic solvents are expensive to
dispose of. Further, the organic solids usually have
25 high toxicity and are difficult to work with. In
addition, the extraction processes can be highly non-
selective. Therefore, sequential chromatographic
techniques must sometimes be used to separate complex
mixtures after extraction, significantly increasing the
30 overall analysis time and the cost. EP-A1-159 230
discloses an extraction method of components in a
liquid by placing packets of fibers in contact with
said liquid in extracting the components.

Solid phase extraction is a known effective
35 alternative to liquid-liquid extraction in the analysis

- 2 -

aqueous samples. The primary advantage of solid phase extraction is the reduced consumption of high purity solvents and the resulting reduction in laboratory costs and the costs of solvent disposal. Solid phase
5 extraction also reduces the time required to isolate the analyte of interest. However, solid phase extraction continues to use solvents and often suffers from high blank values. Further, there is considerable variation between the products offered by different
10 manufacturers and lot-to-lot variation can be a problem when carrying out solid phase extraction procedures. Solid phase extraction cartridges available for manufacturers are normally constructed of plastic which can adsorb the analyte and increase interferences in
15 the analysis. The disposable plastic cartridges used in the solid phase extraction process are first activated using organic solvent. The excess organic solvent is then removed and the sample to be tested is passed through the cartridge. The organic components
20 from the sample are adsorbed on the chemically modified silica surface of the material in the cartridge. Both molecules of interest as well as interferences are retained on the cartridge material. During desorption, a selective solvent is chosen to first remove the
25 interferences. The analyte is then washed out of the cartridge. The analytical procedure from that point is identical to that used in liquid-liquid extraction. The analyte is first preconcentrated and the mixture is then injected into an appropriate high resolution
30 chromatographic instrument. Steps involving the use of organic solvents are the most time consuming.

SUMMARY OF THE INVENTION

A device for carrying out solid phase microextraction of components contained in a fluid
35 carrier is characterized by, in combination, a fiber and a housing surrounding said fiber, said housing

- 3 -

containing access means so that said carrier and components could be brought into contact with said fiber.

A method of carrying out solid phase
5 microextraction and analysis with components contained
in a carrier uses a fiber. The method is characterized
by placing said fiber in contact with said carrier
containing said components for a sufficient period of
time for chemical extraction to occur, subsequently
10 removing said fiber from said carrier and placing the
fiber into a suitable analytical instrument and
carrying out desorption with respect to at least one
component on said fiber.

A method of carrying out solid phase
15 microextraction and analysis with components contained
in a carrier uses a fiber contained in a housing. The
housing has access means so that said carrier can be
brought into contact with said fiber. The method is
characterized by contacting said fiber with said
20 housing for a sufficient time to allow chemical
extraction to occur, ending said contact and placing
said fiber in a suitable analytical instrument in such
a manner that desorption occurs with respect to at
least one component on said fiber.

A device for carrying out solid phase
25 microextraction of components contained in a fluid
carrier has a tubular member having one closed end and
one open end. There is a zone within said tubular
member having an extracting surface. The tubular
30 member has means to vary an interior temperature
thereof with means to activate and deactivate said
means to vary. The means to vary causes a pressure
differential within said tubular member to draw a fluid
carrier into said tubular member into contact with said
35 extracting surface when said open end is in contact
with said fluid carrier.

- 4 -

A device for carrying out solid phase microextraction of components contained in a fluid carrier has a tubular member having one closed end and one open end. The tubular member has an extracting
5 surface therein. The tubular member has a heater to vary an interior temperature of said tubular member with means to activate and deactivate said heater. The open end of the tubular member permits contact between said fluid carrier and said extracting surface.

10 A method for carrying out solid phase microextraction of components contained in a fluid carrier using a tubular member having an open end and a closed end, a zone of said tubular member near said open end having an inner surface with an extracting
15 phase coating thereon, said tubular member having a heater towards said closed end, with means for activating and deactivating said heater, said method comprising activating said heater to expand air within said member and expel some of said air through said
20 open end, contacting said open end in said fluid carrier, subsequently deactivating said heater while maintaining said contact and drawing some fluid carrier into said tubular member in contact with said zone.

A method for carrying out solid phase
25 microextraction of components contained in a fluid carrier using a tubular member having an open end and a closed end, a zone of said tubular member near said open end having an extracting surface located therein, said tubular member having a heater with means for
30 activating and deactivating said heater, said method comprising carrying out microextraction with components of said fluid carrier, subsequently inserting said open end of said tubular member into an injector of an analysis instrument and activating said heater to expel
35 analytes into said injector.

- 5 -

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a partial sectional side view of a syringe and fiber with the plunger depressed;

Figure 2 is a schematic side view of a slightly different syringe and fiber with the plunger withdrawn;

Figure 3 is a schematic side view of a needle portion of a syringe containing a hollow fiber;

Figure 4 is a graph of amount of analyte extracted versus time;

Figure 5 is a graph showing the results of a typical gas chromatography analysis;

Figure 6 is a graph showing another analysis from a gas chromatograph;

Figure 7a shows a chromatogram produced when using the solid phase microextraction of the present invention;

Figure 7b shows a chromatogram produced when using the prior art method of liquid-liquid extraction for the same components as those of Figure 7a;

Figure 8 is a chromatogram of the extraction of gasoline components from water with silicone coated fibers;

Figure 9 is a chromatogram from the extraction of organics from coal gasification waste water using a silicone coated fiber;

Figure 10 is a schematic sectional side view of a tubular member having an extracting phase coating with a heater and cooler;

Figure 11 is a sectional side view of a further embodiment of a tubular member contained within a housing with an airtight cavity located at an open end of said tubular member;

Figure 12 is a side view of Figure 11 showing a lock for a plunger;

Figure 13 is an enlarged view of said airtight cavity and said open end of said tubular

- 6 -

member with said cavity in a closed position;

Figure 14 is a partial sectional side view of the device of Figure 11 with the cavity in an open position and a plunger depressed;

5 Figure 15 is an end view of the device shown in Figure 14;

Figure 16 is a schematic partial sectional side view of the device of Figure 11 aligned with an injector of an analysis instrument; and

10 Figure 17 is a graph showing the results obtained with the device of Figure 10.

DESCRIPTION OF A PREFERRED EMBODIMENT

Referring to Figures 1 and 2 in greater detail, a device 2 for carrying out solid phase
15 microextraction has a syringe 4 containing a fiber 6. The syringe 4 is made up of a barrel 8 which contains a plunger 10 and is slidable within the barrel 8. The plunger 10 has a handle 12 extending from one end 14 of the barrel 8. At the opposite end 16 of the barrel 8,
20 there is located a needle 18 which is connected to the end 16 by the connector 20. The handle 12 and the needle 18 and connector 20 are shown in an exploded position relative to the barrel 8 for ease of illustration.

25 The fiber 6 is a solid thread-like material that extends from the needle 18 through the barrel 8 and out the end 14. An end of the fiber 6 (not shown) located adjacent to the cap 12 has retention means 22 located thereon so that the fiber will move
30 longitudinally as the plunger 10 slides within the barrel 8. The retention means can be simply a drop of epoxy which is placed on the end of the fiber 6 near the handle 8 and allowed to harden. The fiber 6 is partially enclosed in a metal sleeve 24 which surrounds
35 that portion of the fiber 6 located within the plunger 10, the barrel 8 and part of the needle 18. The

- 7 -

purpose of the metal sleeve 24 is to protect the fiber 6 from damage and to ensure a good seal during operation of the device. Extending from the connector 20 is an optional inlet 26. The purpose of the inlet 26 is to allow alternate access to the fiber. For example, when the fiber is contained within the needle 18, fluid could contact the fiber 6 by entering the inlet 26 and exiting from a free end 28 of the needle 18. The inlet 26 can also be used to contact the fiber with an activating solvent.

In Figure 2, a schematic version of the device 2 is shown. The plunger is in a withdrawn position and the free end of the fiber 6 is located entirely within the needle 18. The access permitted by the inlet 26 when the fiber is in the position shown in Figure 2 can readily be understood. Obviously, fluid contacting the fiber 6 within the needle 18 could also enter the free end 28 of the needle 18 and exit from the access 26.

In Figure 3, only the needle portion of the device is shown. A fiber 30 extending from the metal sleeve 24 is hollow. It can be seen that there is an opening 32 in the wall of the metal sleeve 24 to allow access to an interior of the sleeve 24 as well as an interior of the fiber 30. For example, fluid could enter the inlet 26 and an interior of the needle 18. Then, the fluid could pass through the opening 32 and through an interior of the fiber 30 and ultimately exit from the free end 28 of the needle 18. In this embodiment, the fiber does not extend to the handle 12 (not shown) but only the metal sleeve 24 extends to the handle 12. The fiber 30 can still be moved beyond the end 28 of the needle 18 by depressing the plunger and returned to the position shown in Figure 3 by moving the plunger to the withdrawn position.

Alternatively, if it is desired to have the

- 8 -

fiber 30 located within the needle 18 at all times, contact with the fiber 30 can be attained through the inlet 26 or the opening 32 and the free end 28. A plug 33 located within the metal sleeve 24 prevents any fluid from travelling up the sleeve to the handle. In some situations, the fluid could flow through the sleeve 24.

In general terms, the syringe could be said to be a housing for the fibers 6, 30 and the access means could be the action of the plunger 10 in moving the fiber beyond the end 28 or, alternatively, the access means could be the inlet 26.

The disadvantages and inconveniences of the previous processes for analyzing various fluids are overcome by the solid phase microextraction technique of the present invention. The diameter of the fibers will vary but will preferably be between 0.05 millimeters and 1 millimeter. Much of the experimentation on which the present invention was based, was carried out using fused silica fibers that were chemically modified. The fused silica fibers are widely used in optical communication and are often referred to as optical fibers.

Chemical modification of these fibers can be achieved by the preparation of the surface involving etching procedures to increase the surface area followed by chemical attachment of the desired coating. The stationary phases bonded to the surface of the silica fibers are similar to that used in fused silica gas chromatograph columns or high performance liquid chromatography columns.

As an example, fused silica fibers were obtained from Polymicro Technologies Inc., Phoenix, Arizona and these fibers were coated with polyimide and had an outer diameter of approximately 171 μm . Uncoated fused silica was obtained by burning off the

- 9 -

polyimide coating and gently scraping off the charred portion. To use the polyimide film as a stationary phase, it was first heated at 350° C for four hours. The polyimide was then burned off and the char removed, 5 except for a one to two millimeter portion at the end of the fiber. In all cases, the polyimide was burned off after the fiber had been inserted into the syringe and trimmed to the correct length. After burning, the fiber became fragile and had to be handled carefully. 10 The metal casing is used to strengthen the fiber. The normal lifetime for a prepared fiber was five to six weeks with regular use.

The solid phase microextraction process does not require a sophisticated coating system to be a 15 useful technique. Either the uncoated fiber, fused silica, silicone or the polyimide films that optical fibers are shipped with can be a suitable stationary phase.

The method of solid phase microextraction and 20 analysis consists of a few simple steps. For example, when a water matrix sample containing components of interest is desired to be analyzed, the plunger of the syringe is depressed and the exposed fiber extending from the free end of the needle is inserted into the 25 water matrix sample. The organic components of the water are extracted into the non-polar phase. Water is considered to be the carrier in a water matrix sample. Where the water sample is contained in a bottle containing a septum, the needle is inserted through the 30 septum first before the plunger is depressed so that the fiber will not be damaged by the septum. When the microextraction has occurred to a sufficient degree (usually approximately two minutes), the plunger is moved to the withdrawn position causing the fiber to be 35 drawn into the needle and the needle is removed from the sample bottle through the septum. Preferably, the

- 10 -

sample is stirred while the fiber is inserted. The time for extraction will depend on many factors including the components being extracted as well as the thickness and type of coating, if any, on the fiber.

- 5 Usually, the extraction time is approximately two minutes. The plunger is then moved to the withdrawn position to retract the fiber into the needle. The needle is then removed from the bottle and is inserted through the septum in an injection port of a
- 10 conventional gas chromatograph or other suitable analytical instrument. The plunger is then depressed again to expose the fiber and the organic analytes on the fiber are thermally desorbed and analyzed. The fiber remains in the analytical instrument during the
- 15 analysis. When the analysis has been completed, the plunger is moved to the withdrawn position and the syringe is removed from the injection port. Various injection ports are suitable such as the "split-splitless" type or the "on-column" type.

- 20 While various types of syringes will be suitable, a HAMILTON 7000 (a trade mark) series syringe has been found to be suitable. The syringe facilitates convenient operation of the solid phase microextraction process and protects the fiber from damage during the
- 25 introduction into a sample bottle or into an injector of an analytical instrument or even during storage. The length of the fiber depends on the injector of the analytical instrument with which the fiber will be used. Preferably, the fiber is mounted in a housing to
- 30 a movable part so that the fiber is movable longitudinally within the housing. Still more preferably, the movable part moves a sufficient distance so that at least part of said fiber can be extended outside of said housing and retracted into
- 35 said housing successively. The movable part is preferably an elongated member which extends partially

- 11 -

outside of the housing. The part of the elongated member that extends partially outside of the housing preferably has a handle thereon. The elongated member can be a plunger.

5 In addition to the improved convenience of the present device and method, the method differs significantly in the extraction part of the process compared to the prior art solid phase extraction process using cartridges. The extraction process in
10 accordance with the present invention does not require prior sampling of aqueous material since in-vivo or in-vitro sampling can be conveniently performed. The microextractor can be directly inserted into the fluid stream. The simple geometry of the fiber eliminates
15 clogging caused by particle matter present in the samples. Also, due to the small size of the fiber, not all of the organic compounds are extracted but rather the equilibrium described by the partition coefficient between the water and organic stationary phase for a
20 given analyte is established. Therefore, the solid phase microextraction method of the present invention can be made selective by appropriate choice of a specifically designed organic phase. The partitioning between the aqueous phase and the organic coating can
25 be described through the distribution constant, K:

$$K = \frac{C_s}{C_{aq}} \quad (1)$$

where C_s is the concentration in the stationary phase and C_{aq} is the concentration in the water. The partition ratio, k' , is therefore:

30
$$k' = \frac{C_s V_s}{C_{aq} V_{aq}} = \frac{n_s}{n_{aq}} = K \frac{V_s}{V_{aq}} \quad (2)$$

where n_s and n_{aq} are the number of moles in the stationary and aqueous phases, respectively, and V_s and V_{aq} are the volumes of the respective phases.

Rearranging Eqn. 2 yields:

- 12 -

$$n_s = K \frac{V_s n_{aq}}{V_{aq}} \quad (3)$$

substituting $C_{aq} V_{aq}$ for n_{aq} results in:

$$n_s = K V_s C_{aq} = A C_{aq} \quad (4)$$

where $A = K V_s$.

- 5 A linear relationship between concentration of analytes in aqueous samples and detector response is expected based upon the relationship in equation (4). The slope of the linearity curve can be used to determine the partition coefficient for a given analyte
- 10 if the volume of the stationary phase is known. Furthermore, the sensitivity of the fiber can be adjusted by changing the volume (thickness or area) of the stationary phase.

- The linear dynamic range of the method
- 15 typically extends several orders of magnitude for coatings similar to chromatographic stationary phase materials. The limit of quantization depends on the partition coefficient and the thickness of the coating and can be as low as a few ppt (parts per trillion),
- 20 which was obtained for chlorinated solvents. In this case the amount of the solvents extracted by a thick polyimide coating from a water sample is about 30 pg per component at a 1 μ g/L concentration. This amount ensures not only ECD detection but will allow mass
- 25 spectrometric identification and quantization.

- The dynamics of the extraction process is illustrated on Figure 4 which shows an example of a typical relationship between the amount of analyte adsorbed onto the microextractor (peak area) versus the
- 30 extraction time, which corresponds to the exposure time of the fiber to the water matrix sample. Initially, the amount of analyte adsorbed by the stationary phase increases with the increase in extraction time. This trend is continued until the point of steady state is
- 35 achieved which causes the relationship to level off.

- 13 -

This situation indicates the state of equilibrium between the concentration of the analyte in the stationary phase and in the water matrix sample and defines optimum extraction time. According to Figure 3, optimum extraction time for uncoated fiber (about .1 μm film of silica gel) and PCBs as analytes is about one minute.

Figure 5 illustrates the chromatogram corresponding to a PCB mixture in water extracted and analyzed by the solid phase microextraction method. Peak tailing is larger for the more volatile compounds than the heavier, later eluting components. This is an effect of thermal focussing that occurs when the analytes are volatilized at 300° C and transferred to a 150° C oven. The heavier compounds benefit from thermal focussing, but the oven is at too high a temperature to allow focussing of the more volatile compounds. The tailing can be alleviated by using a cryogenically cooled oven to improve focussing.

An uncoated fiber can also be used to adsorb benzene, toluene, ethyl benzene and xylenes (BTEX) from aqueous solutions. For this separation (Figure 6), a flame ionization detector (FID) was used, illustrating that a sufficient quantity was adsorbed for FID detection. This expands the general applicability of the fiber as FID detectors are somewhat easier to operate and maintain than ECD detectors. The extraction efficiency in this case is sufficiently high to deplete significantly the analyte after 2 to 3 injections if a small volume of aqueous material (1 to 2 mL) is sampled. A larger sample volume (100 mL) is thus recommended if multiple injections are necessary.

Moderate levels of organic interferences and variation in ionic strength of aqueous solution do not significantly change the extraction equilibria. However, large amounts of organic solvent could be

- 14 -

added intentionally to introduce partitioning selectivity, as is commonly done in liquid chromatography.

The fiber method has great potential for the analysis of highly sorptive compounds that can be difficult to sample without loss of analyte. Losses to storage bottles and transfer lines could potentially be eliminated by sampling in situ and analyzing the fiber in the field using portable gas chromatograph instrumentation. The device and method of the present invention can utilize a mechanical device such as an autosampler. The autosampler can be programmed to operate the plunger at the appropriate time to contact the carrier and to insert the syringe and the fiber into the injection port of the analytical instrument. The autosampler has an advantage over manual extraction and analysis in that the contact time and the length of the fiber in the carrier as well as in the instrument can be maintained constant. A VARIAN 3500 gas chromatograph and a VARIAN 8100 autosampler has been found to be suitable.

Possible applications of this technique include sampling of both surface and groundwater samples, either in situ or in the laboratory. It could potentially be used in on-line process applications or clinical analysis. Both of these applications benefit from the simplified sample preparation. The coating can be designed for either a broad scan of the organic contaminants (non-selective fiber coating) or selective sampling. This method, when combined with laser desorption, could reduce the sample extraction and analysis to a fraction of a minute. In this technique the optical fiber is used as a light guide. In a variation of the invention, the syringe could have a laser source affixed thereto with activation means and coupling optics to focus light onto the fiber which



- 15 -

will transmit the light to a free end thereof to desorb the components thereon. Curie point heating and microwave desorption are alternative desorption methods. The fiber also shows promise as a method of
5 studying the adsorption properties of polymers and for obtaining information about partitioning in liquid chromatographic systems.

Figure 7 illustrates the advantages of the method of the present invention compared to the prior
10 art solvent procedure. The chromatogram from Figure 7a corresponds to silica fiber techniques using C-18 coating and Figure 7b to liquid-liquid extraction with chloroform. In both cases the same effluent from a sewage treatment plant was analyzed under the same
15 chromatographic conditions. Results are similar, however the total extraction time was about an hour for the solvent method and two minutes for the fused silica fiber technique. The chromatogram for Figure 7b shows the presence of the solvents used in the liquid-liquid
20 extraction. The solid phase microextraction device facilitates easy sampling in the field. In addition, when organic solvents are used in the preparation step, the corresponding large peak together with possible impurities can mask volatile analytes (Figure 7b).

25 In Figure 8, there is shown a chromatograph for the extraction of gasoline components from water using a silicone coated fiber. In Figure 9, there is shown a chromatograph for the extraction of organics from coal gasification waste water using a silicone
30 coated fiber. Both analyses and identifications for Figures 8 and 9 have been done using a mass spectrometry detector.

In Figure 10, a device 38 for carrying out solid phase microextraction of components contained in
35 a fluid carrier is shown. A tubular member 40 has an open end 42 and a closed end 44. Near the open end 42

- 16 -

is a zone 46 having an inner surface 48 with an extraction phase coating 50 thereon. The zone 46 could be located further into the tubular member 40 but is preferably located near the end 42. Also, the material from which the tubular member 40 is formed could be made of a material that would provide an interior extracting surface without the use of a coating. Near the closed end 44, there is located a heater 52 and a cooler 54 that are set up to heat and cool respectively the tubular member 40. The heater 52 is a coil connected to a power source 56 with switch means 58 to activate and deactivate the heater 52. The cooler 54 is preferably a Pelletier cooler and is connected in a conventional manner to a power source 59. Preferably, the tubular member 44 is a capillary having a circular cross-section. When reference is made to contact between a fluid carrier and the open end of the tubular member or the zone or extracting surface of the tubular member or similar variations thereof, the contact is intended to include and does include contact with a headspace of the fluid carrier.

In operation of the device 38, when it is desired to use the device, the heater 52 is activated by closing the switch 58, thereby heating up the tubular member 40 and causing air within the member to expand. Excess air exits through the open end 42. While the device is being heated, or immediately thereafter, the open end 42 is placed in contact with fluid carrier (not shown). Subsequently, the heater is turned off by opening the switch 58. Next, the cooler 54 is activated by activation means (not shown). Alternatively, the cooler can be activated while the heater is on so that the tubular member will cool more quickly when the heater is turned off. The cooler cools the air remaining within the tubular member and causes it to contract, thereby drawing carrier fluid

- 17 -

into the open end 42 in contact with the extracting phase coating 50. When it is desired to analyze the carrier fluid within the tubular member 40, the open end 42 and that part of the tubular member near the open end 42 is inserted into an injector just as the cooler is deactivated. The injector desorbs analytes from the coating 50 into the analysis instrument. The heater is activated, once again, after the open end 42 has been inserted into the injector and after the cooler 54 has been deactivated. The activation of the heater 54 assists in expelling the analytes into the injector. The cooler 54 is optional. After the device has been heated to expel some of the air within the device, the heater is deactivated and, instead of using the cooler, the device can be left to cool as a result of the heater being deactivated. Further, while the heater is strongly preferred over the use of just a cooler, if the device were used without a heater but with a cooler, the cooler could be activated to draw fluid carrier into the tubular member when the open end is in contact with the fluid carrier. The cooler would remain activated until it was desired to desorb the analytes into an injector.

In Figures 11, 12 and 13, there is shown a device 60 for carrying out solid phase microextraction of components contained in a fluid carrier (not shown). A tubular member 62 is mounted within a housing 64. The tubular member has a plunger 66 located at a closed end 68 and an airtight cavity 70 located at an open end 72. The cavity 70 is shown in a closed position in Figures 11, 12 and 13. A heater 74 is located on the tubular member near the closed end 68. The heater 74 is connected to a power supply 76 and has switch means 78 to activate and deactivate said heater. Near the open end 72, there is located a zone 80 having an inner surface 82 with an extraction coating 84 located

- 18 -

thereon. As with the device 38 of Figure 10, the zone can be located further inside the tubular member from the open end 72, but is preferably located near the open end 72. Also, the tubular member could be a
5 hollow fiber made of various materials, including metal. The material of the tubular member can be chosen so that the inner surface of the tubular member is an extracting surface without the use of a coating. An advantage of using coatings is the flexibility
10 achieved to selectively extract various different components.

A cap 86 has a closed position and an open position (not shown in Figures 11 and 12). The cap 86 is mounted on the housing 64 by corresponding screw
15 threads 88, 90 respectively that intermesh with one another. The cap can be designed to be completely removable from the housing 64 or to simply move to an open position. The cap has a centrally located opening 92 therein to assist in sealing the airtight cavity 70.

20 The cavity 70 is preferably comprised of four identical leaves 94 (only two of which are shown in Figures 11 and 13). In a closed position, the leaves are sealed along all area of contact 96. Preferably, the cavity 70 is made of soft metal and is still more
25 preferably made of brass.

The plunger 66 is connected to the closed end 68 of the tubular member 62. The plunger is also connected to a slidable sleeve 98. When the plunger 66 is depressed (with the cavity 70 in the open position),
30 the sleeve 98 and tubular member 62 slide longitudinally within the housing 64. The plunger is spring-mounted by a spring 100 that is biased to urge the plunger 66 to the retracted position shown in Figure 11. In Figures 11 and 12, the plunger is
35 actually shown in a slightly depressed position for ease of illustration. A removable closure 102 is

- 19 -

screwed onto a top of the housing 64 by corresponding screw threads 104, 106 respectively. The purpose of the closure 102 is to prevent the plunger from being accidentally depressed. The sleeve 98 provides
5 guidance for the tubular member 62 and also provides some protection for the tubular member. However, the sleeve 98 could be eliminated by making an appropriate change in an interior shape of the housing 64.

As can be seen from Figures 11 and 12, the
10 device 60 has a lock 107 thereon. The lock 107 has a vertical channel 109 located in the housing 64 with a middle horizontal section 111 and a lower horizontal section 113. A protrusion 115 extends from the sleeve 98. Before the plunger is depressed, the cavity 70,
15 which is shown in a closed position in Figures 11 and 12, must be moved to the open position. When the plunger is depressed, the protrusion 115 reaches the middle horizontal section 111, the plunger can be
20 twisted or rotated slightly counterclockwise relative to the housing 64 to lock the plunger in the middle stage position. When it is desired to depress the plunger further, the plunger can be manually depressed until the protrusion 115 reaches the lower horizontal section 113. The plunger and sleeve can then be
25 twisted or rotated still further in a counterclockwise direction to lock the plunger into a lower stage position.

When it is desired to release the plunger from either the lower stage or the middle stage
30 position, the plunger can be turned slightly in a clockwise direction. This will allow the protrusion and the plunger to move upward.

In a further embodiment shown in Figure 14,
the cap 86 has a shield 108 mounted thereon. The
35 shield protects the cavity 70 and the tubular member 62 from damage when the tubular member extends beyond the

- 20 -

cavity 70. The shield contains various perforations 110 and a main opening 112 to allow access of the fluid carrier (not shown). It can be seen that the leaves 94 of the cavity 70 are in an open position in Figure 14 and the plunger has been depressed to the middle stage as the open end 72 of the tubular member 62 extends beyond the cavity 70 into an area of the shield 108 where the open end can be placed in contact with carrier fluid (not shown). In order for the cavity 70 to open, the cap 86 must be moved from the closed position shown in Figures 11, 12 and 13 to the open position shown in Figure 14. In order to move the cap from the closed position to the open position, the cap must be loosened slightly by twisting it counterclockwise when viewed from the bottom relative to the housing 64. The cap does not have to be completely removed from the housing 64 as long as it is opened a sufficient distance that the leaves 94 spread apart from one another as shown. The leaves 94 are preferably biased to spring outward when the pressure from the cap 86 at the opening 92 is released. Thus, as the cap is loosened, the opening 92 moves downward vis-a-vis the cavity 70 from the position shown in Figure 13 to the position shown in Figure 14. The leaves 94 then spread apart. In order to close the cavity 70, the cap 86 is turned clockwise, when viewed from the bottom, vis-a-vis the housing 64 and the opening slides up a tapered edge 117 of the cavity 70 to the position shown in Figure 13. As the cap is turned onto the housing, the leaves 94 will close gradually until they are completely closed when the cap has been tightened onto the housing 64. Of course, the plunger must be released and unlocked to retract the tubular member to the position shown in Figure 13 before beginning to close the cavity 70.

An end view of the device shown in Figure 14

- 21 -

is set out in Figure 15. It can be seen that the shape of the shield 108 and cap 86 is cylindrical and that the cavity 70 has a circular cross-section.

As shown in Figure 16, when the tubular member 62 contains a fluid carrier (not shown) and it is desired to analyze one or more components of that fluid carrier, the cavity 70 can be reopened by loosening the cap 86 with respect to the housing 64. The plunger can then be depressed to the lower stage so that the tubular member enters an injector 118 of an analysis instrument 120. The injector 118 has heating means 122 thereon to desorb analytes from the fluid carrier and the coating into the analysis instrument 120. The heater 74 (not shown in Figure 16) is activated to further assist in expelling analytes into the analysis instrument 120. It should be noted that the shield 108 has been removed in Figure 16 to bring the cavity 70 closer to the injector 118. If desired, the device 60 could be designed so that the tubular member is long enough and the plunger can be depressed far enough so that the tubular member can be made to enter the injector without removing the shield 108.

The lock 107 is optional as is the spring 100 for the plunger. Without the spring, the plunger will remain in whatever position it is placed in and the lock is not necessary. Even if the plunger is spring-mounted, the lock is still not necessary as the plunger can be held in a depressed position for the desired time period when the tubular member is exposed beyond the cavity 70.

In operation of the device 60, starting from the closed position of the cavity 70 as shown in Figure 12, the closure 102 is removed to expose the plunger 66 and the cap 86 is loosened to open the cavity 70. The heater 74 is then activated by closing the switch 78 to heat the air within the tubular member and expel some

- 22 -

of the air through the open end 72. Preferably, while the heater is still activated, or just after the heater is deactivated, the plunger is depressed and the open end is placed in contact with a fluid carrier (not shown). Preferably, the plunger is rotated relative to the housing to lock the plunger in a middle stage position with the tubular member extending beyond the cavity. The heater is then deactivated, causing the air within the tubular member to contract. As the air contracts, some of the fluid carrier is drawn into the open end 72 into contact with the coating 84 in the zone 80. The plunger is then released and will return to the retracted position. Then, the cap 86 is tightened to close the cavity 70 and the closure 102 is replaced over the plunger 66.

With either the device 38 or the device 60, it is not necessary to activate the heater when using the device to contact air in order to draw the air into the tubular member to contact the extracting surface. The heater can be left in a deactivated mode during microextraction and used only during desorption when the tubular member is inserted into an injector. For example, in-tube solid phase microextraction can be carried out using either the device 38 or the device 60. The device 60 is preferred because the contact between the zone of the tubular member and the fluid carrier can be limited or restricted by not moving the tubular member outside of the cavity after the cavity has been opened. Also, the amount that the cavity 70 is opened can be adjusted by loosening the cap 86 to a point between the open and closed position. For example, the present invention can be used for in-tube solid phase microextraction sampling.

The device 60 can then be transported to a location having a suitable analysis instrument. The closure 102 is removed and the cap 86 is loosened to

- 23 -

open the cavity 70. The device 60 is aligned with the injector. The plunger is then depressed to the middle stage and then twisted vis-a-vis the housing and immediately moved to the lowermost stage. At this

5 stage, the plunger is twisted again in a counterclockwise direction when viewed from the top of the plunger to lock the plunger in position in the lowermost stage. In this position, the tubular member extends into the injector 118 as shown in Figure 16.

10 The injector heating means 122 is then activated as is the heater 74 of the device 60. When the analytes have been desorbed into the injector, the heater 74 is deactivated, the plunger is released from the lowermost stage and twisted to ultimately return

15 the plunger back to the retracted position shown in Figure 11. The cap 86 is then retightened to close the cavity 70 and the closure 102 is replaced over the plunger. An advantage of using the heater 74 during desorption is that the tubular member is "cleansed" and

20 is ready for reuse for carrying out solid phase microextraction again with respect to the same or different components.

In Figure 17, the peaks representing the components are shown when the heater is used to assist

25 the heat source of the injector in desorbing analytes into the injector. The peaks are sharper when the heater 74 is used during desorption and are more rounded when the heater is not used.

In addition to the analyte concentration

30 measurement at a well defined place in space and time, obtained by using the approaches discussed above, an integrating sampling is possible with a simple SPME system. This is particularly important in field measurements when changes of analyte concentration over

35 time, and place to place variations, must often be taken into account.

- 24 -

When the extracting phase is not exposed directly to the sample, but is contained in the tubular member or needle without any flow of the sample through it (as discussed above), the extraction occurs through the static gas phase present in the tubular member. The integrating system can consist of an extracting phase coating on the interior of the tubing as shown in Figures 3, 10 or 11, or it can be an externally coated fiber withdrawn into the needle as shown in Figures 1 and 2. These geometric arrangements represent a very powerful method able to generate a response proportional to the integral of the analyte concentration over time and space (when the tubing or needle is moved through the space). In these cases, the only mechanism of analyte transport to the extracting phase is diffusion through the gaseous phase contained in the tubing. During this process, a linear concentration profile is established in the tubing between the small needle opening, characterized by surface area A and the position of the extracting phase, located at the distance Z from the opening. The amount of analyte extracted, dn, during time interval, dt, can be calculated by considering the first Fick's law of diffusion:

$$dn = AD_g \frac{dC}{dz} dt = AD_g \frac{\Delta C(t)}{Z} dt \quad (5)$$

where $\Delta C(t)/Z$ is a value of the gradient established in the needle between needle opening and the position of the extracting phase, Z; $\Delta C(t) = C(t) - C_z$, where C(t) is a time dependent concentration of analyte in the sample in the vicinity of the needle opening, and C_z concentration of the analyte in the gas phase in the vicinity of the coating. C_z is close to zero for a high coating/gas distribution constant capacity, then: $\Delta C(t) = C(t)$. The concentration of analyte at the coating position in the needle, C_z , will increase with

- 25 -

integration time, but it will be kept low compared to the sample concentration in the sample $C(t)$ because of the presence of the sorbing coating. Therefore the accumulated amount over time can be calculated as:

5
$$n = D_g \frac{A}{Z} \int C(t) dt \quad (6)$$

As expected, the extracted amount of analyte is proportional to the integral of a sample concentration over time, the diffusion coefficient of analytes in gaseous phase, D_g , area of the needle opening, A , and inversely proportional to the distance of the coating position in respect of the needle opening, Z . It should be emphasized that equation 5 is valid only in a situation where the amount of analyte extracted onto the sorbent is a small fraction (below
10 RSD of the measurement, typically 5%) of equilibrium amount in respect to the lowest concentration in the sample. To extend integration times, the coating can be placed deeper into the needle (larger Z), the opening of the needle can be reduced by placing an
15 additional orifice (smaller A), or a high capacity sorbent can be used. The first two solutions will result in a low measurement sensitivity. An increase of sorbent capacity presents a more attractive opportunity. It can be achieved by either increasing
20 the volume of the coating, or its affinity towards the analyte. An increase of the coating volume will require an increase of the device size. The optimum approach to increased integration time, is to use sorbents characterized by large coating/gas
25 distribution constants.
30

While air will be the usual atmosphere within the tubular member, obviously, other atmospheres can be utilized in the same manner as described with respect to air. In some embodiments, it may be preferable to
35 coat a fiber which can be made of metal or other

- 26 -

material and to fixedly insert the fiber inside the tubular member so that the coating on the fiber provides the extracting surface rather than an interior surface of the tubular member itself or a coating on the interior surface of the tubular member itself. Also, when a cooler is used with the device along with a heater, it is preferable to turn the heater on either before or just after the heater is activated and to leave the cooler on so that the extracting surface cools more quickly once the heater is deactivated. While a battery is preferably mounted on the device to operate the heater so that the device is completely self-sufficient, the device 60 could be designed with connectors for connecting the heater to an external power source or the device 60 could be designed to operate both from a battery mounted on the device and/or from an external power source where, for example, the battery is dead.

The device and method of the present invention can also be used for extraction and analysis of gases and for supercritical fluids as well. The method is not limited to analysis of organic analytes but also for inorganic ions by using ion-exchange materials located on the fiber surface. In addition to thermal desorption by direct heating, laser desorption or conductive heating, for example, microwave desorption or Curie point magnetic hysteresis method could be used. Both solid fibers and hollow fibers, or other tubular members, will be suitable depending on the use that is being made of the present invention. For example, fused silica, graphite fibers, fibers constructed with solid polymeric materials and even metal and metal wires can be used as fibers and the fibers can be coated with various materials or uncoated. Some suggested coatings are CARBOWAX (a trade mark), poly(dimethylsiloxane),

- 27 -

poly(divinylbenzene), poly(divinyldibenzene), carbon, NAFION (a trade mark), nylon, octadecyltrichlorosilane, polymethylvinylchlorosilane, liquid crystalline polyacrylates, silicone, polyimide, grafted self-

5 assembled monolayers and inorganic coatings. Fibers coated with these coatings are stored under nitrogen or helium to prevent absorption of the volatile organics present in air. The coatings can be organic or inorganic, for example, fused silica surface.

10 In addition to having coating located on an outer surface of a solid fiber, coating could be located on an inner surface of a hollow fiber or other tubular member. Coating could also be located on the packing material used with the fiber. In addition to

15 direct extraction, the method of the present application could be performed with prior activation using organic solvents by using the optional inlet 26 on the syringe. The analytical instrument used with the method of the present invention can also be varied.

20 For example, a gas chromatograph, a liquid chromatograph or a supercritical fluid chromatograph could be used. Other analytical methods such as flow injection analysis, mass spectrometry, atomic absorption or emission including inductively coupled

25 plasma technique could be used.

In addition to analyzing for environmental contaminants, the method and device of the present invention can be used to monitor or measure the components in industrial process streams. The present

30 invention can also be used to study properties of coatings, for example, absorption, deterioration rates and diffusion coefficients.

Numerous other variations, within the scope of the attached claims, will be readily apparent to

35 those skilled in the art.

- 28 -

I CLAIM:

1. A device for carrying out solid phase microextraction of components contained in a fluid carrier, said device comprising:
 - 5 (a) a tubular member having one closed end and one open end, a zone within said tubular member having an extracting surface;
 - (b) said tubular member having means to vary an interior temperature thereof, with means to
10 activate and deactivate said means to vary, said means to vary causing a pressure differential within said tubular member to draw a fluid carrier into said tubular member into contact with said extracting surface
15 when said open end is in contact with said fluid carrier.
2. A device as claimed in Claim 1 wherein an extracting surface of said zone is formed by an extracting phase coating on a surface of said tubular
20 member within said zone.
3. A device as claimed in Claim 2 wherein said zone extends along a length of said tubular member.
4. A device as claimed in Claim 3 wherein said means to vary an interior temperature is a heater
25 connected to a power source, said heater being activated to expand air within said tubular member thereby creating a positive pressure differential to expel air within said tubular member, said heater being deactivated when said open end of said tubular member
30 is in contact with said fluid carrier, the deactivation of said heater creating a negative pressure differential within said tubular member to draw said fluid carrier into contact with said zone.
5. A device as claimed in Claim 4 wherein said
35 zone is located near said open end.
6. A device as claimed in Claim 4 wherein the

- 29 -

supporting member has a cooler with means to activate and deactivate said cooler, said cooler being activated to draw further fluid carrier into contact with said zone when said heater is deactivated with said open end
5 in contact with said fluid carrier.

7. A device as claimed in any one of Claims 1, 4 or 5 wherein said tubular member is a hollow fiber.

8. A device as claimed in any one of Claims 2, 4 or 5 wherein said coating is formed of a material
10 selected from the group of non-polar and polar coatings.

9. A device as claimed in any one of Claims 2, 4 or 5 wherein the coatings are formed of a material selected from the group of poly(dimethylsiloxane),
15 poly(divinylbenzene), poly(divinyldibenzene), carbon, Nafion, nylon, carbowax, silicone, polyimide, octadecyltrichlorosilane, polymethylvinylchlorosilane, liquid crystalline polyacrylates, grafted self-assembled monolayers and inorganic coatings.

20 10. A device as claimed in any one of Claims 1, 4 or 5 wherein the tubular member is a capillary.

11. A device as claimed in any one of Claims 1, 4 or 5 wherein said tubular member is located within a housing, said housing having an airtight cavity at said
25 open end of said tubular member, said cavity having an open position and a closed position, said cavity sealing said open end when in said closed position and permitting contact between said fluid carrier and said open end when in said open position.

30 12. A device as claimed in Claim 2 wherein said tubular member is located within a housing, said housing having an airtight cavity at said open end of said tubular member, said cavity having an open position and a closed position, said cavity sealing
35 said open end when in said closed position and permitting contact between said fluid carrier and said

- 30 -

open end when in said open position.

13. A device as claimed in Claim 12 wherein said cavity has at least two parts that seal against one another along a line of contact when said cavity is in said closed position and separate from one another when
5 said cavity is in said open position.

14. A device as claimed in Claim 13 wherein said cavity has four parts that seal against one another along lines of contact when said cavity is in said
10 closed position and separate from one another when said cavity is in said open position.

15. A device as claimed in any one of Claims 12, 13 or 14 wherein said cavity is made from a soft metal.

16. A device as claimed in any one of Claims 12, 13 or 14 wherein said cavity is made from brass.
15

17. A device as claimed in Claim 12 wherein said closed end of said tubular member is connected to a plunger, said tubular member being slidable within said housing, said plunger being depressed when said cavity
20 is in said open position, to expose said tubular member outside of said cavity, said plunger being retracted before said cavity is moved to said closed position.

18. A device as claimed in Claim 17 wherein said housing has a cap mounted thereon at an end of said
25 housing where said cavity is located, said cap having an open position and a closed position, said cavity being in a closed position when said cap is in a closed position, said cavity being in an open position when said cap is in an open position, said cap having a
30 centrally located opening to receive said cavity and to assist in sealing said cavity when said cavity is in a closed position.

19. A device as claimed in Claim 17 wherein said plunger is spring-mounted whereby a spring urges said
35 plunger to return to the retracted position.

20. A device as claimed in any one of Claims 12,

- 31 -

14 or 17 wherein said means to vary said temperature is a heater for said tubular member with means to activate and deactivate said heater, said heater being powered by a power source and being activated to expel air from
5 within said tubular member, said heater being deactivated when said tubular member is in contact with said fluid carrier, the deactivation of said heater creating a negative pressure differential within said tubular member to draw said fluid carrier into contact
10 with said zone.

21. A device as claimed in Claim 18 wherein said cap is connected to said housing by way of corresponding screw threads, said cap having a perforated shield extending outward therefrom to
15 protect said tubular member when said tubular member extends beyond said cavity.

22. A device as claimed in Claim 19 wherein said plunger has locking means for releasably locking said plunger in a depressed position.

20 23. A device as claimed in any one of Claims 17, 18 or 19 wherein said housing has a removable closure located to cover said plunger when said plunger is not in use.

24. A device as claimed in any one of Claims 17,
25 18 or 19 wherein said means to vary said temperature is a heater for said tubular member, said heater being connected to a power source located on said device, said heater being connected so that said heater will be activated for a finite time period when said plunger is
30 depressed, said heater automatically deactivating after said time period has expired even though said plunger remains in a depressed position.

25. A device as claimed in Claim 12 wherein said tubular member is a hollow fiber.

35 26. A device as claimed in any one of Claims 12 or 25 wherein said zone is located near said open end.

- 32 -

27. A device as claimed in Claim 4 wherein said heater is powered by a power source selected from a group of a battery and a transformer connected to an AC power source.
- 5 28. A device as claimed in any one of Claims 1, 3 or 12 wherein said means to vary is a heater for said tubular member, said heater being located between said zone and said closed end.
29. A device as claimed in Claim 1 wherein said
10 tubular member is located within a housing, said housing having an airtight cavity at said open end of said tubular member, said cavity having an open position and a closed position, said cavity sealing said open end when in said closed position and
15 permitting limited contact between said fluid carrier and said open end when in said open position while said open end of said tubular member remains within said cavity.
30. A device as claimed in Claim 29 wherein said
20 closed end of said tubular member is connected to a sleeve and a plunger is also connected to said sleeve, said sleeve being slidable longitudinally within said housing when said plunger is depressed and retracted.
31. A device as claimed in Claim 29 wherein said
25 tubular member has a heater with means to activate and deactivate said heater.
32. A device for carrying out solid phase microextraction of components contained in a fluid carrier, said device comprising:
- 30 (a) a tubular member having one closed end and one open end, said tubular member having an extracting surface therein;
- (b) said tubular member having a heater to vary
35 an interior temperature of said tubular member with means to activate and deactivate said heater;

- 33 -

(c) said open end of said tubular member
permitting contact between said fluid carrier
and said extracting surface.

33. A device as claimed in Claim 32 wherein said
5 extracting surface extends along a zone of said tubular
member.

34. A device as claimed in Claim 33 wherein said
extracting surface is a surface of said tubular member.

35. A device as claimed in Claim 33 wherein said
10 extracting surface is an extracting phase coating on a
surface of said tubular member.

36. A device as claimed in Claim 33 wherein said
tubular member is located within a housing, said
housing having an airtight cavity at said open end of
15 said tubular member, said cavity having an open
position and a closed position, said cavity sealing
said open end when in said closed position and
permitting limited contact between said fluid carrier
and said open end when in said open position.

20 37. A device as claimed in Claim 36 wherein the
cavity is adjustable between an open position and a
closed position.

38. A device as claimed in Claim 37 wherein said
closed end of said tubular member is connected to a
25 plunger, said tubular member being slidable within said
housing, said plunger being depressed when said cavity
is in an open position to expose said tubular member
outside of said cavity, said plunger being retracted
before said cavity is moved to said closed position.

30 39. A device as claimed in Claim 36 wherein said
closed end of said tubular member is connected to a
sleeve and a plunger is connected to said sleeve, said
sleeve being slidable within said housing when said
plunger is depressed or retracted while said cavity is
35 in an open position.

40. A device as claimed in Claim 36 wherein said

- 34 -

extracting surface is a zone extending longitudinally within said tubular member near said open end, said extracting surface being an extracting phase coating on an interior surface of said tubular member.

5 41. A method for carrying out solid phase microextraction of components contained in a fluid carrier using a tubular member having an open end and a closed end, a zone of said tubular member near said open end having an inner surface with an extracting
10 phase coating thereon, said tubular member having a heater toward said closed end, with means for activating and deactivating said heater, said method comprising activating said heater to expand air within said member and expel some of said air through said
15 open end, contacting said open end and said fluid carrier, subsequently deactivating said heater while maintaining said contact and drawing some fluid carrier into said tubular member in contact with said zone.

42. A method as claimed in Claim 41 including the
20 steps of subsequently inserting said open end of said tubular member into an injector of an analysis instrument, heating the extracting surface from a heat source of the injector and activating said heater of said tubular member to assist in expelling analytes
25 into said injector.

43. A method as claimed in Claim 42 wherein said tubular member is located within a housing, said housing having an airtight cavity at an open end of said tubular member and a plunger to slide said tubular
30 member longitudinally relative to said housing, said airtight cavity having an open position, said method comprising the steps of commencing when said cavity is in said closed position, opening said cavity, activating said heater and depressing said plunger to
35 slide said tubular member longitudinally so that said open end is exposed beyond said cavity, contacting said

- 35 -

open end with said fluid carrier, subsequently
deactivating said heater while maintaining contact with
said fluid carrier until some of said fluid carrier is
drawn into said open end in contact with said zone,
5 retracting said plunger to slide said open end
containing some fluid carrier into said cavity and
subsequently closing said cavity.

44. A method as claimed in Claim 43 including the
steps of subsequently opening said cavity and
10 depressing said plunger to insert said open end of said
tubular member into an injector of an analysis
instrument, heating the zone from a heat source of the
injector and activating said heater of said tubular
member to assist in expelling analytes into said
15 injector.

45. A method for carrying out solid phase
microextraction of components contained in a fluid
carrier using a tubular member having an open end and a
closed end, a zone of said tubular member near said
20 open end having an extracting surface located therein,
said tubular member having a heater with means for
activating and deactivating said heater, said method
comprising carrying out microextraction with components
of said fluid carrier and subsequently inserting said
25 open end of said tubular member into an injector of an
analysis instrument and activating said heater to expel
analytes into said injector.

46. A method as claimed in Claim 45 wherein said
tubular member is located within a housing, said
30 housing having an airtight cavity at an open end of
said tubular member, said cavity having an open
position and a closed position, a degree of opening
said cavity being adjustable between said open position
and said closed position, said method comprising the
35 steps of commencing when said cavity is in a closed
position, placing the device in a desired location,

- 36 -

opening said cavity to permit limited access between said fluid carrier and said open end, subsequently closing said cavity, aligning said housing with an injector, reopening said cavity and inserting said open
5 end into an injector of an analysis instrument.

47. A method as claimed in Claim 46 wherein said tubular member has a plunger thereon to move said tubular member in and out of said cavity when said cavity is in an open position, said method including
10 the steps of opening said cavity and depressing said plunger to expose said open end of said tubular member beyond said cavity while inserting said open end of said tubular member into said injector of said analysis instrument, carrying out desorption and after
15 desorption has been completed and analytes have been expelled into said injector, removing said open end from said injector, retracting said plunger to cause said open end to retract into said cavity and closing said cavity.

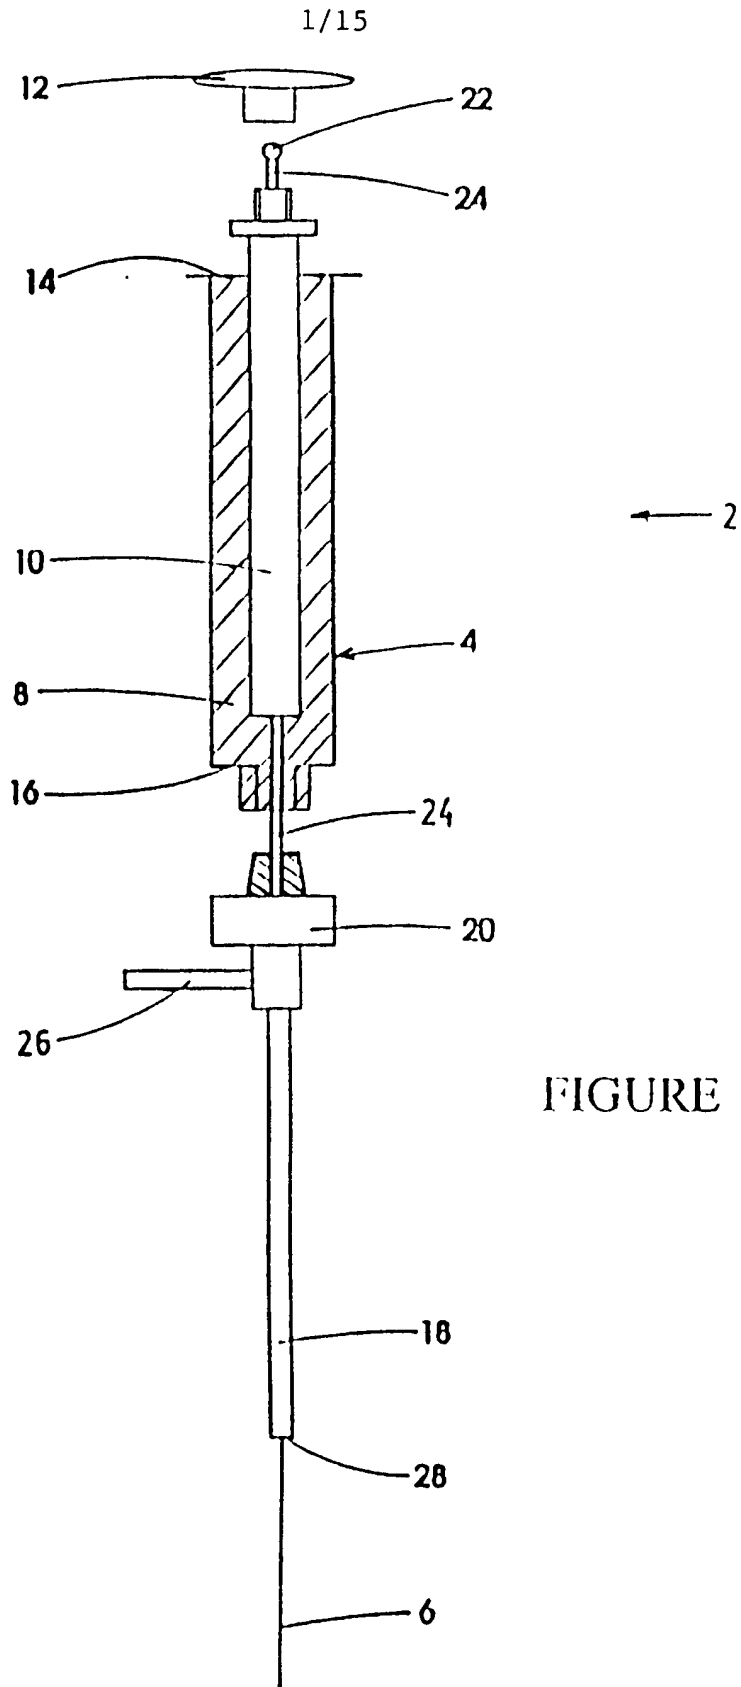


FIGURE 1

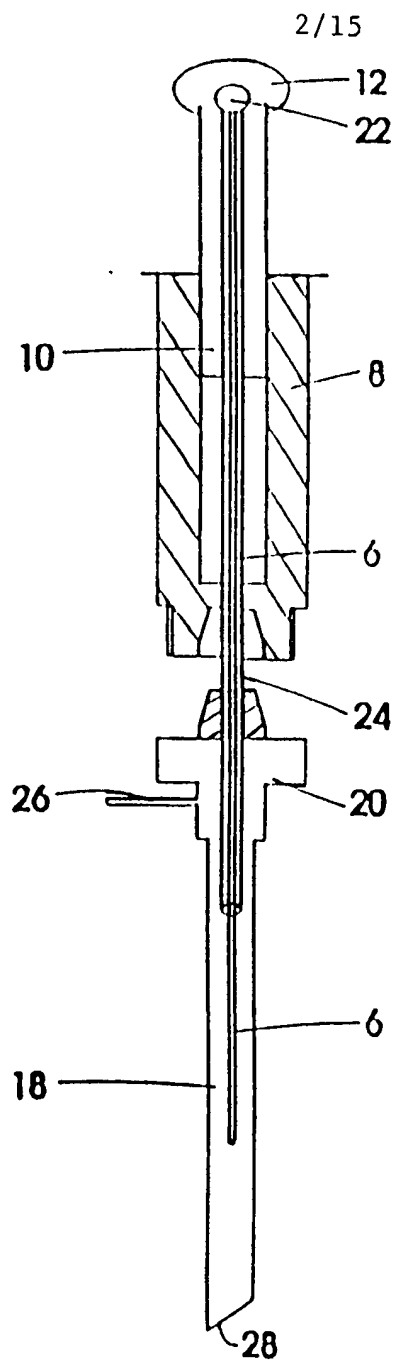


FIGURE 2

3/15

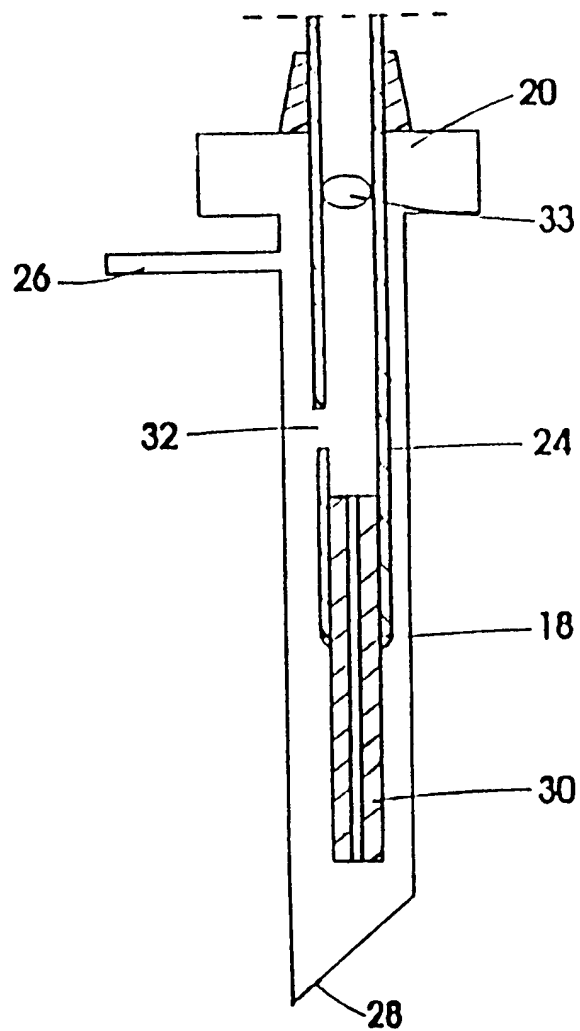


FIGURE 3

4/15

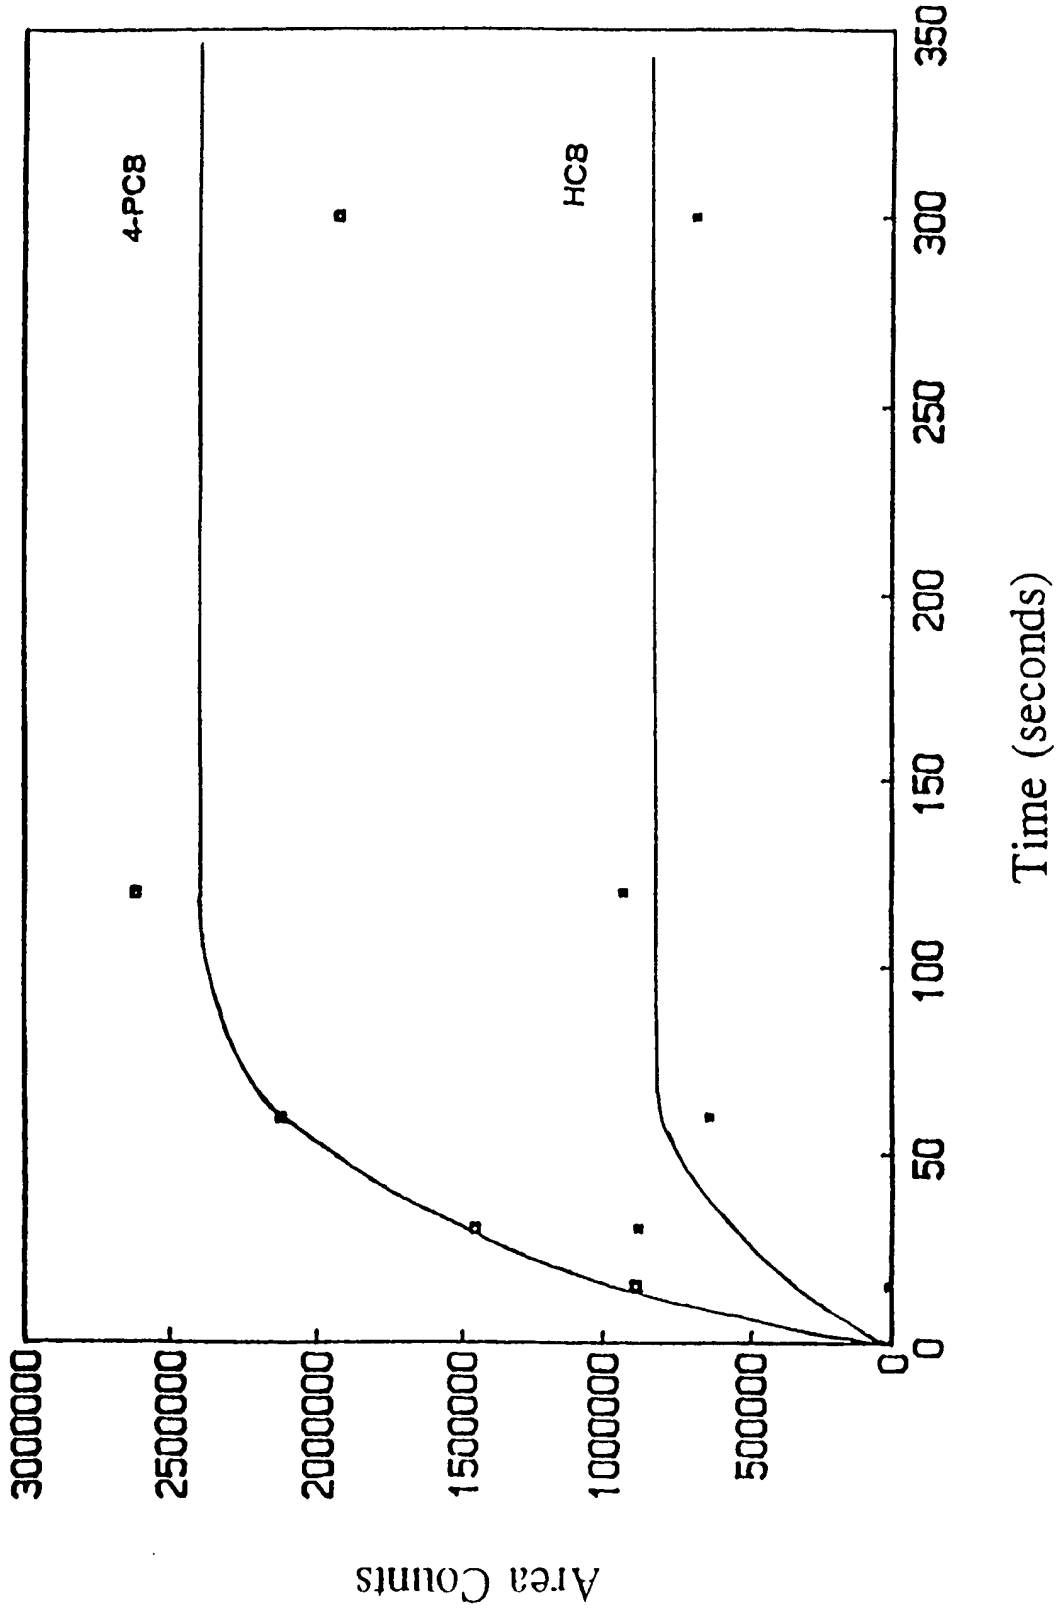


FIGURE 4

5/15

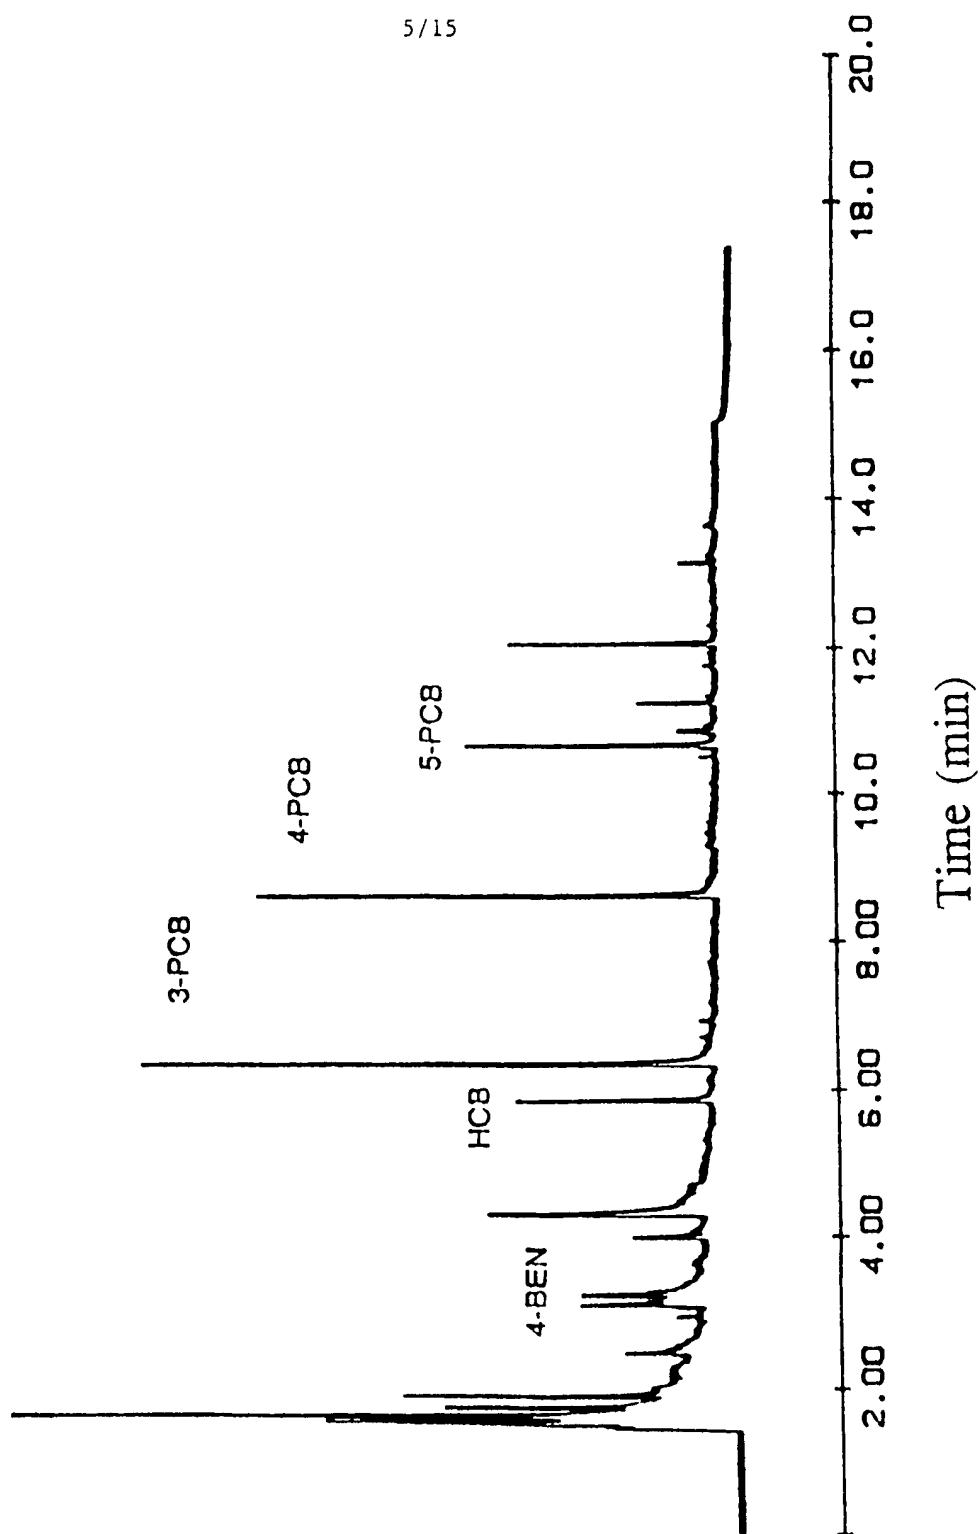


FIGURE 5

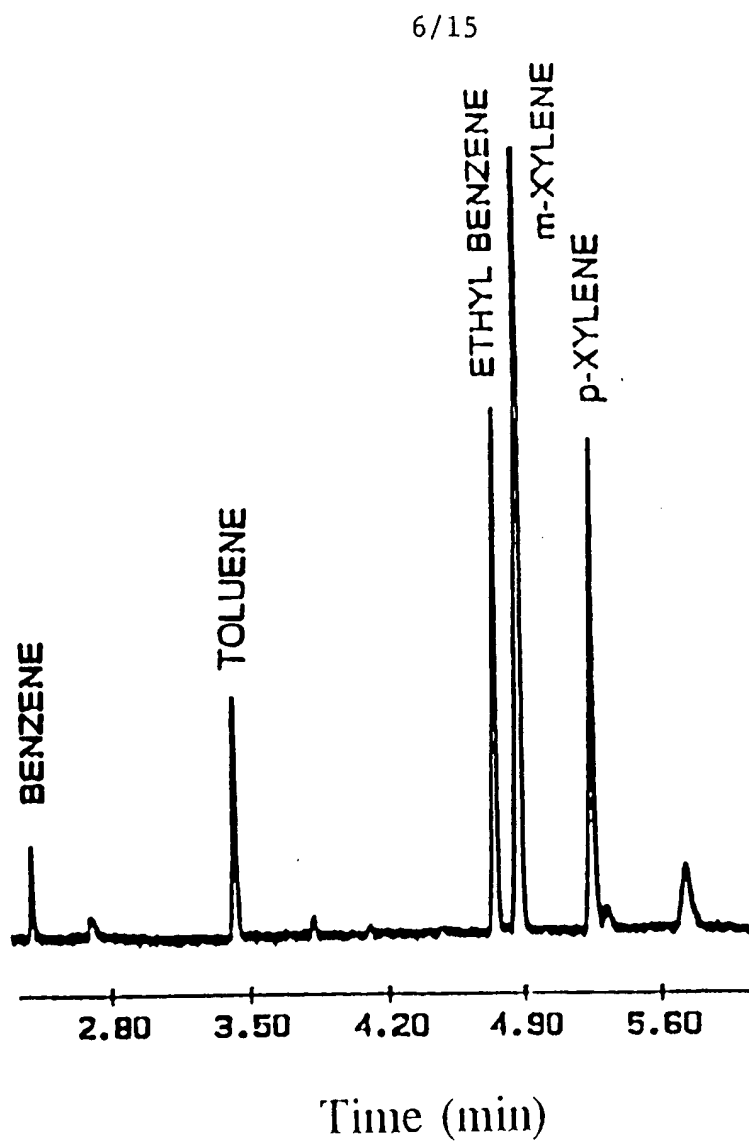


FIGURE 6

7/15

FIGURE 7a


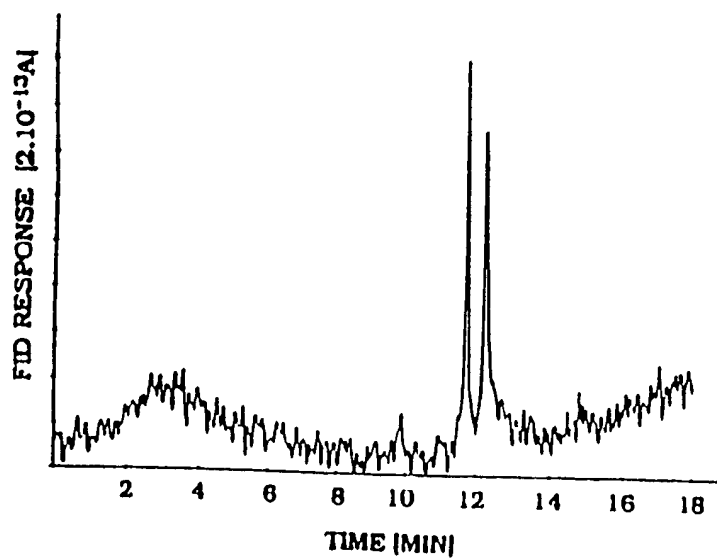


FIGURE 7b

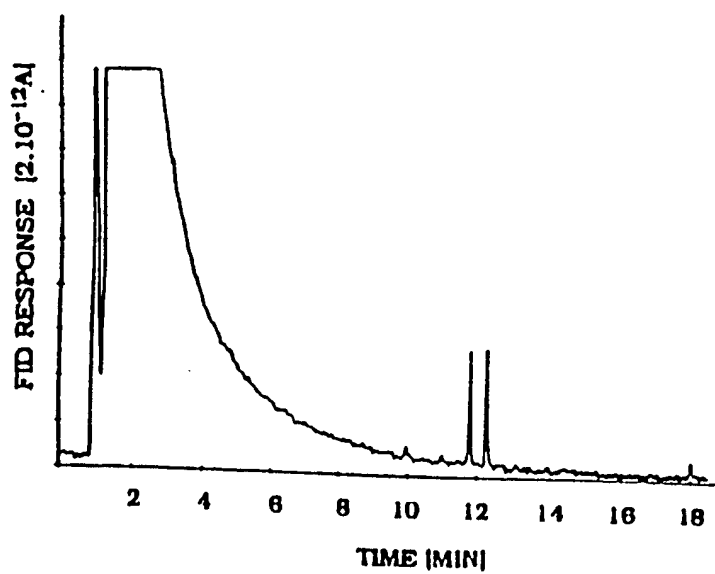

TOT


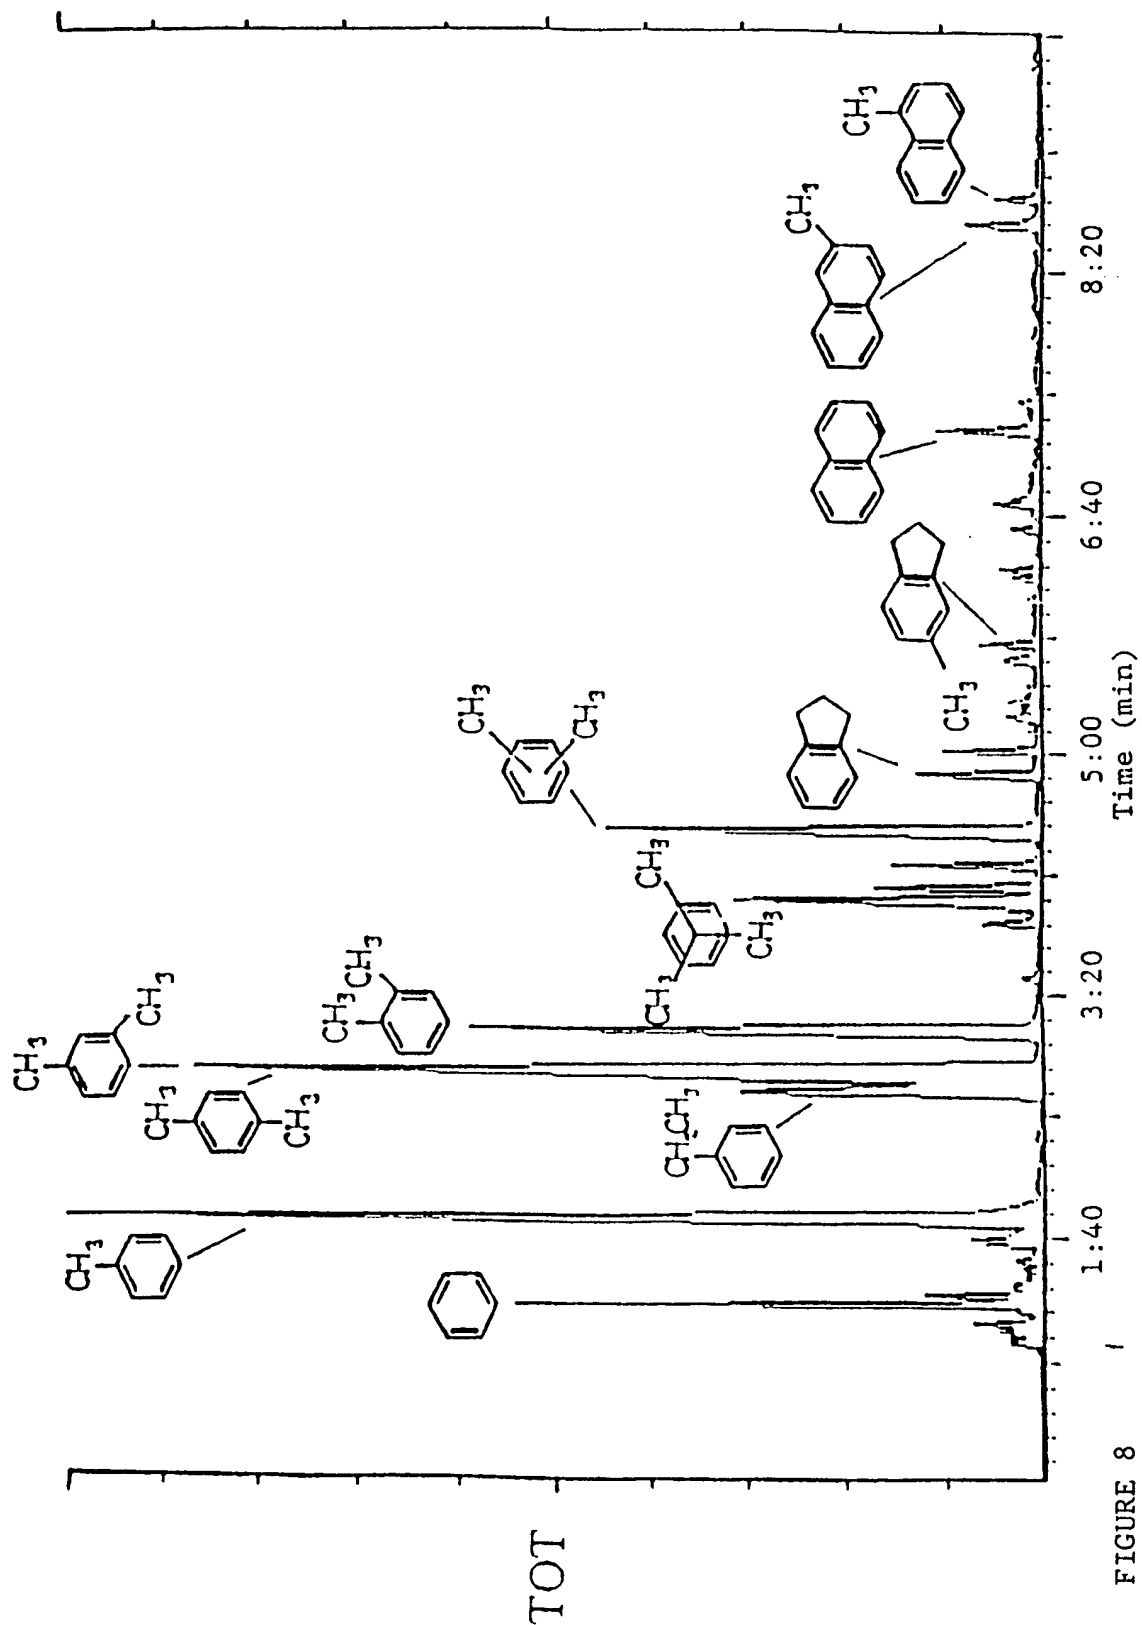


FIGURE 8

9/15

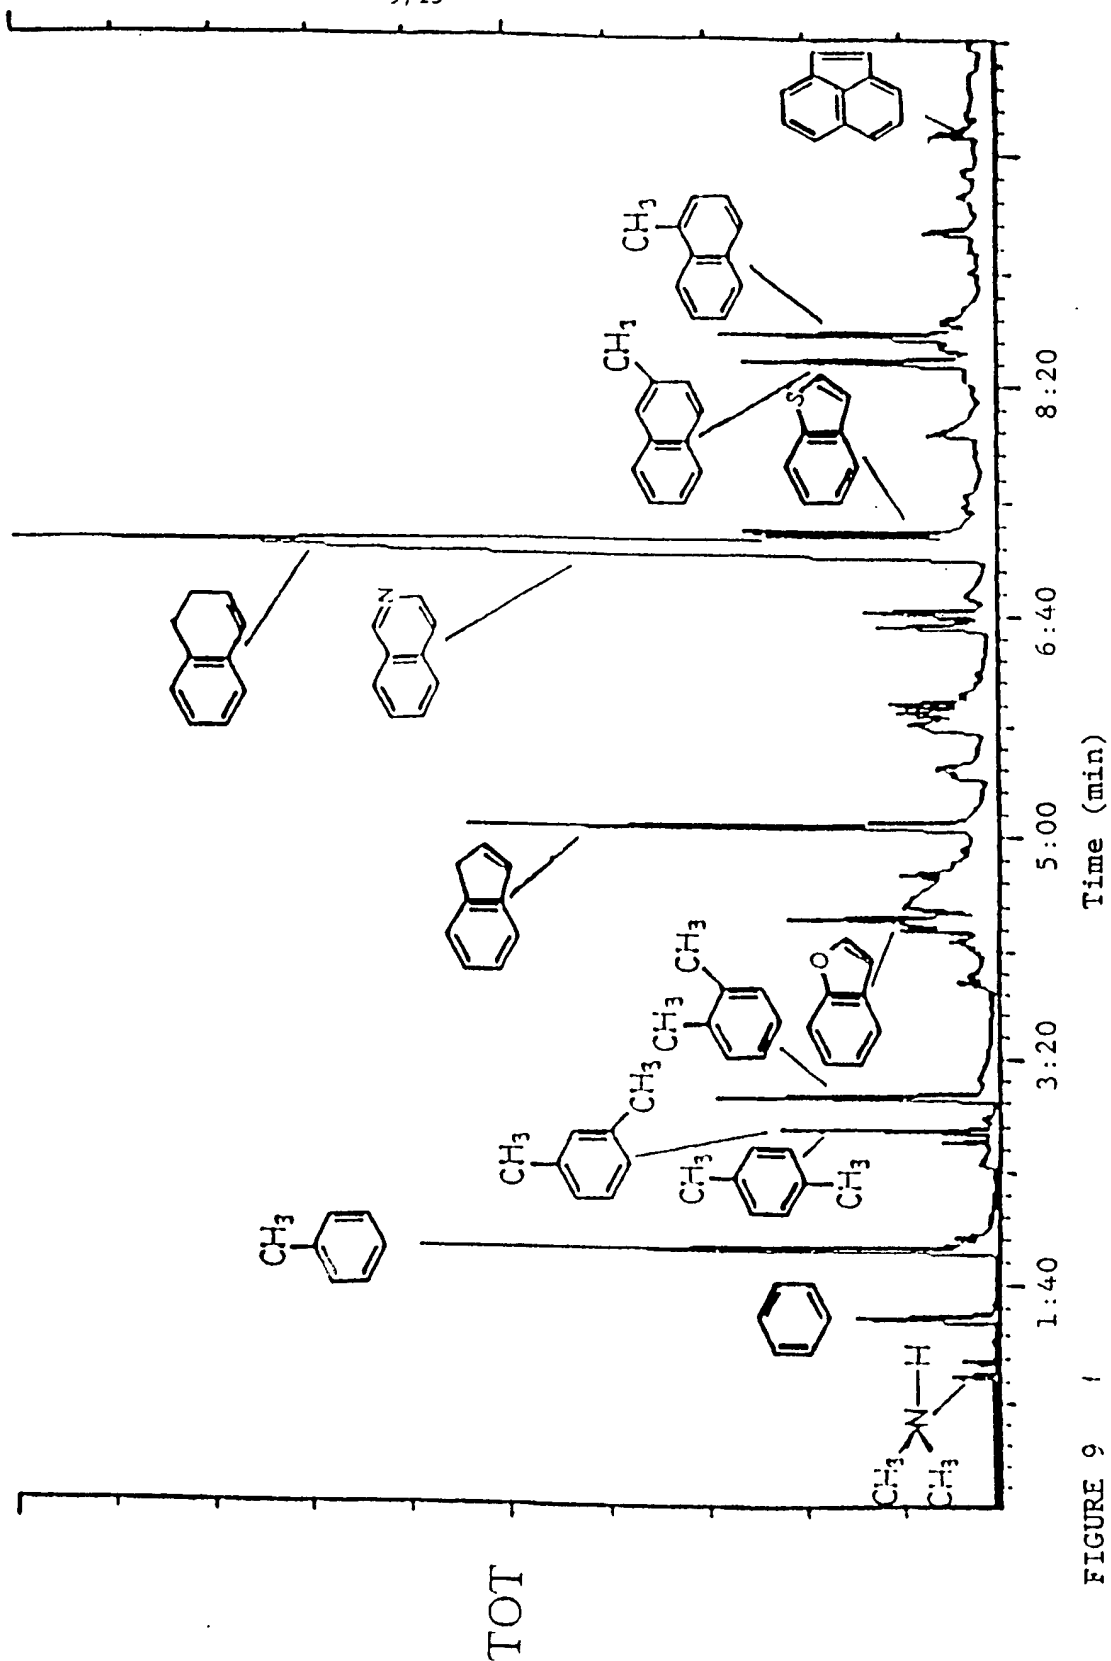

10/15

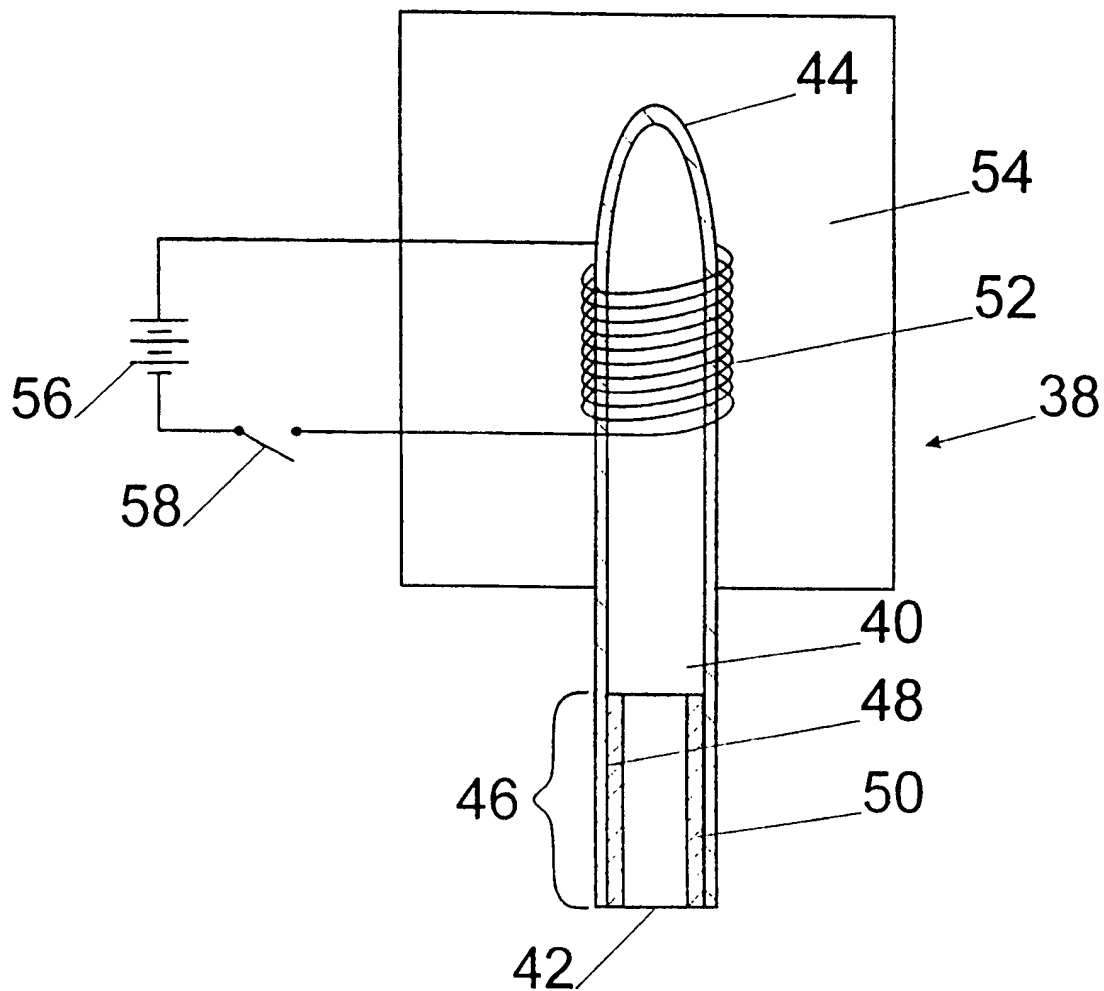


Figure 10

11/15

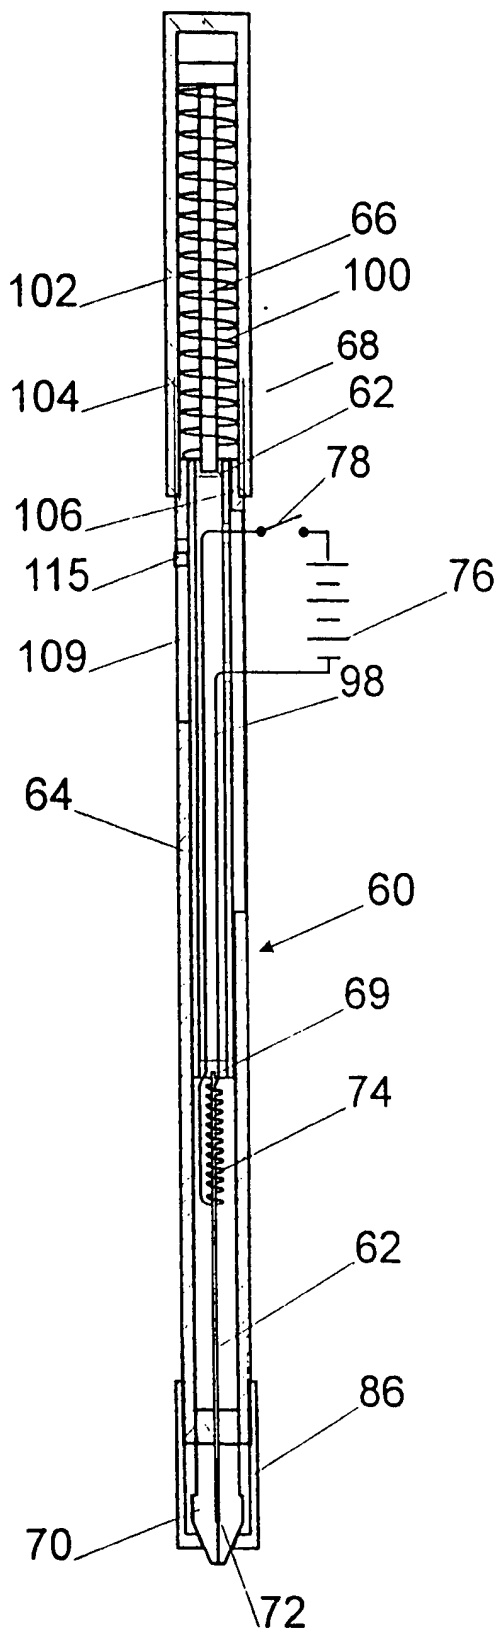


Figure 11

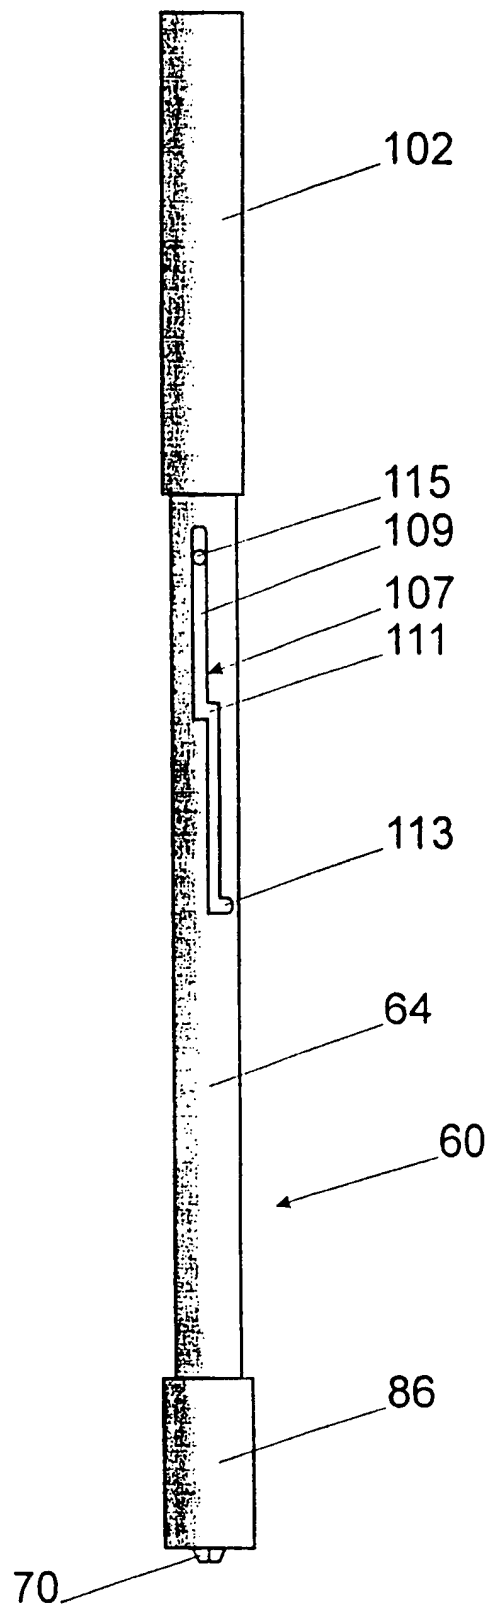


Figure 12

SUBSTITUTE SHEET (RULE 26)

12/15

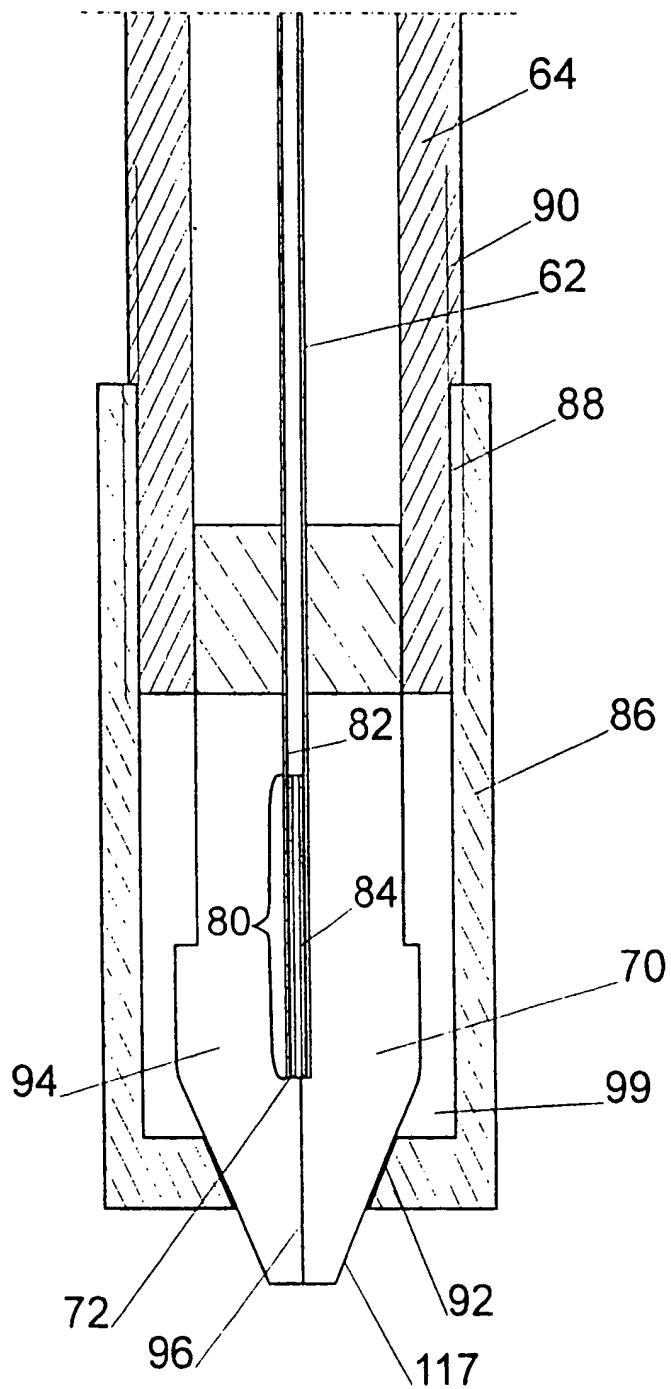


Figure 13

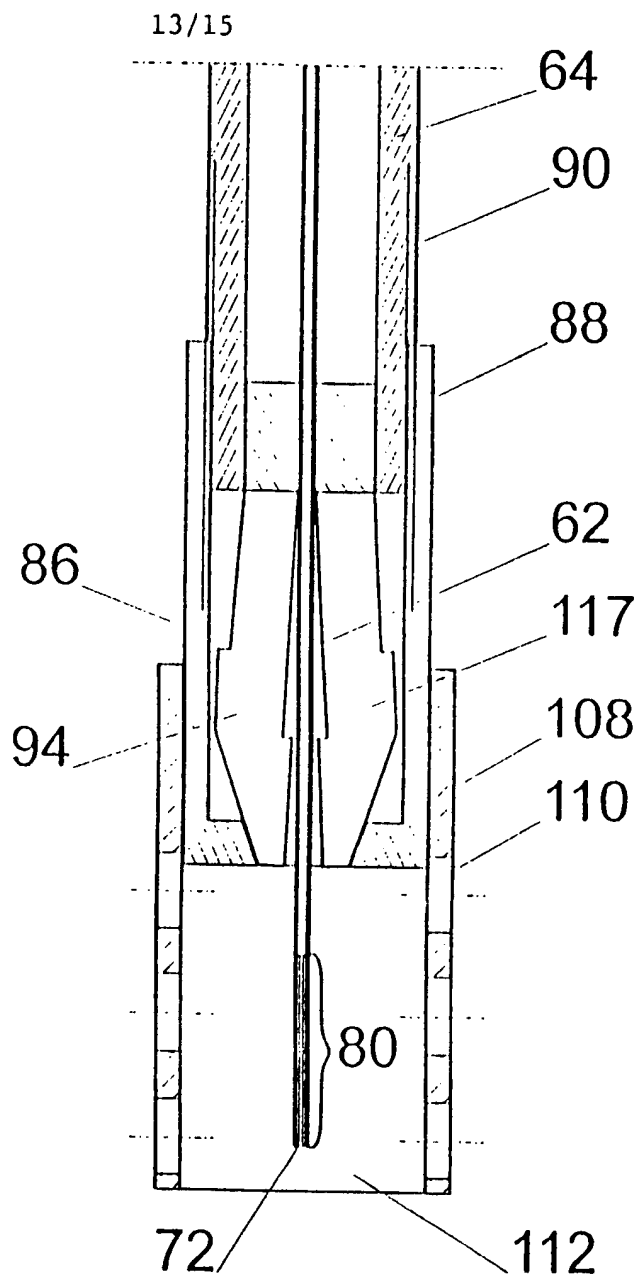


Figure 14

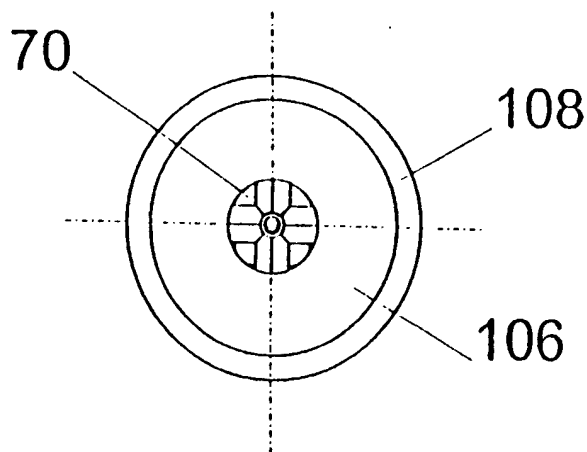


Figure 15

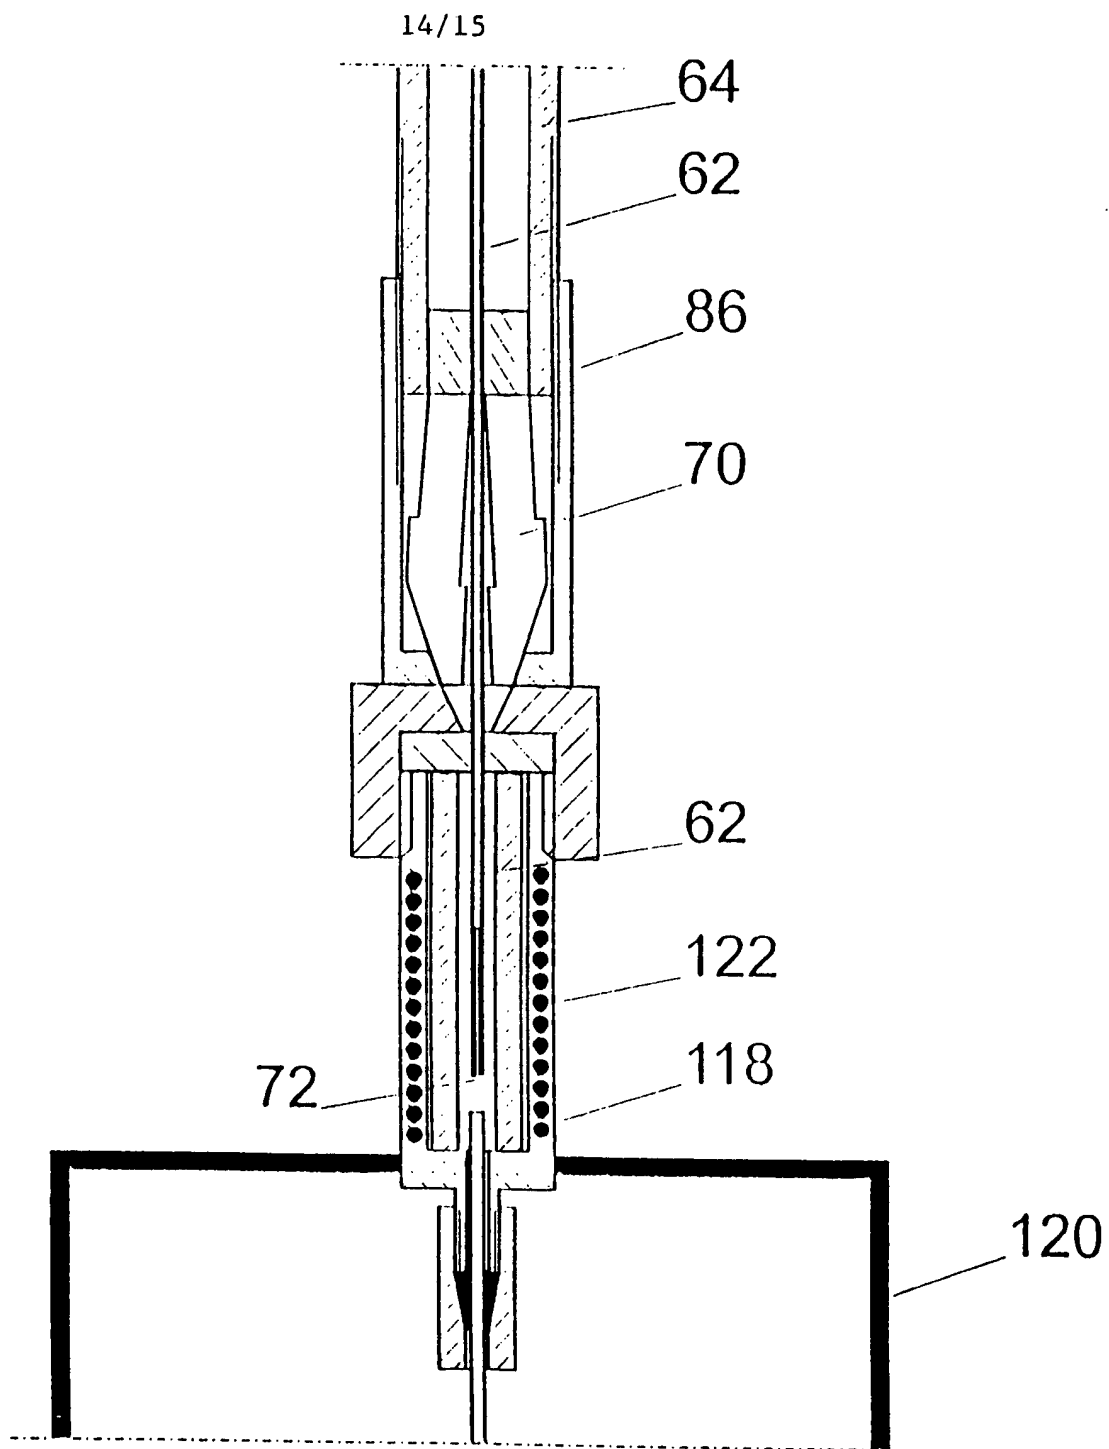


Figure 16

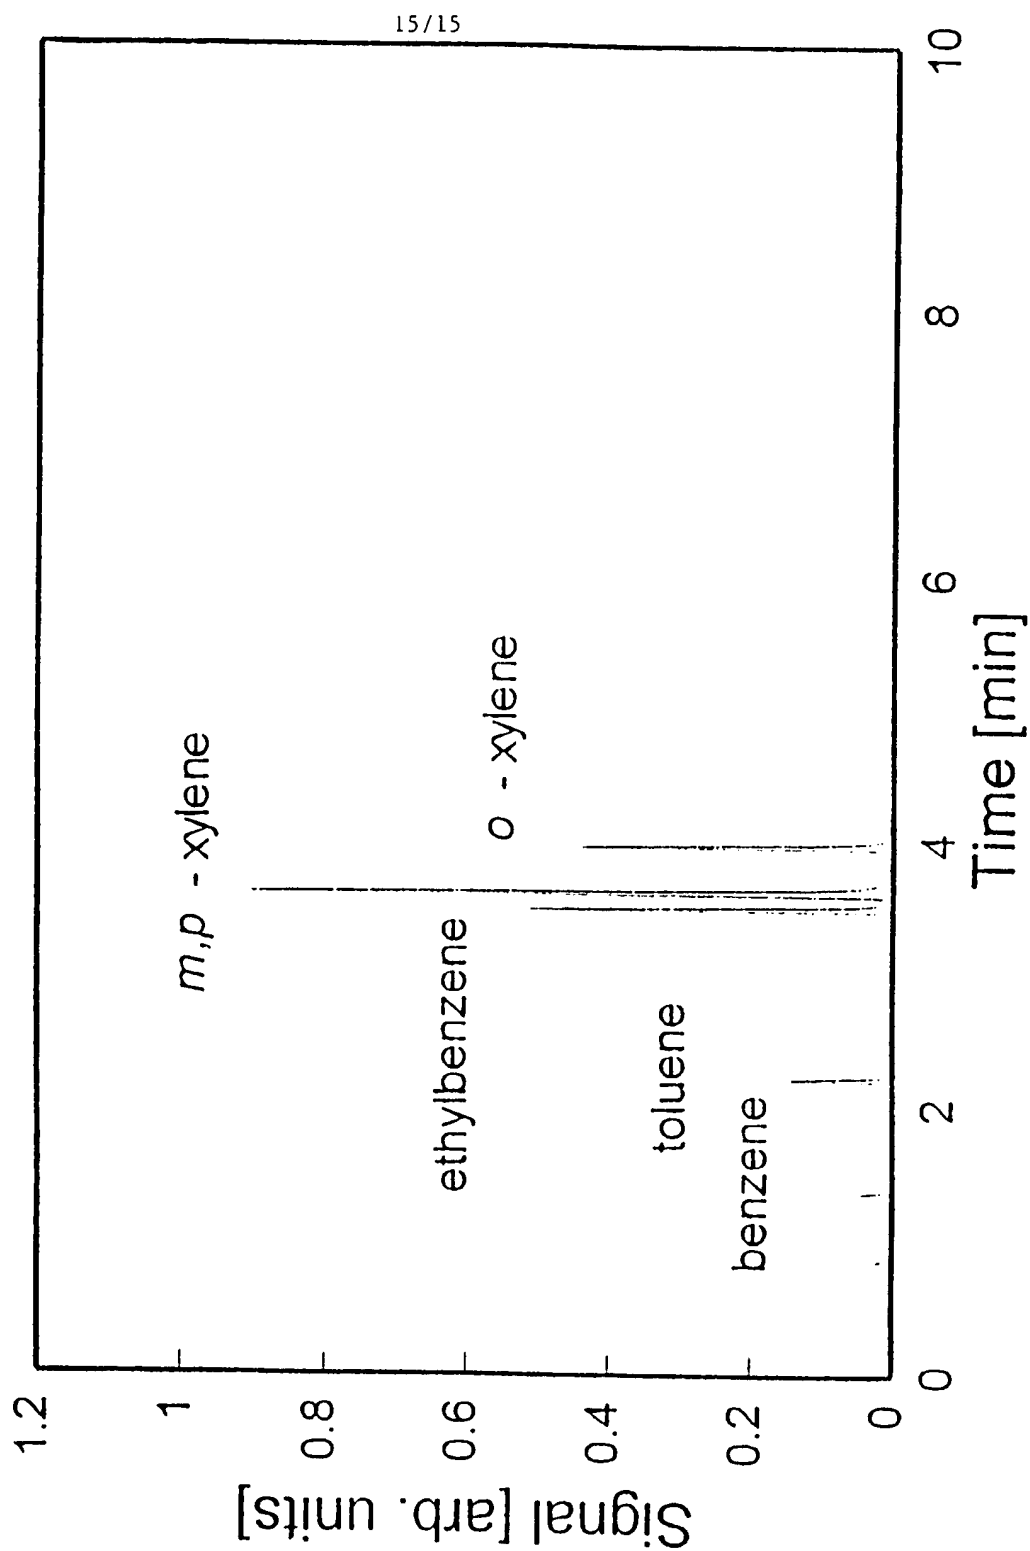


Figure 17

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 98/00235

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G01N30/18 G01N1/40

According to International Patent Classification(IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 565 622 A (MURPHY GREGORY E) 15 October 1996 see abstract; figure 1 see column 2, line 11 - column 4, line 8 ---	1-6, 32-35, 41,42,45
Y	WO 96 00614 A (YASSINZADEH ZIA ;LINGANE PAUL J (US)) 11 January 1996 see abstract; figures 4-7 see page 2, line 15 - page 5, line 31 see page 14, line 5 - page 14, line 20 ---	1-6, 32-35, 41,42,45
A	GB 2 211 111 A (SAXON MICRO LIMITED) 28 June 1989 see the whole document --- -/--	1-6, 32-35, 41,42,45



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

17 July 1998

Date of mailing of the international search report

27/07/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Runser, C

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 98/00235

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>WO 91 15745 A (PAWLISZYN JANUSZ B) 17 October 1991</p> <p>see abstract; figures 1-3 see page 1, line 1 - page 3, line 20 see page 5, line 18 - page 8, line 27 ---</p>	<p>1,7,11, 12,25, 36,41,42</p>
A	<p>ZHOUYAO ZHANG ET AL: "SOLID-PHASE MICROEXTRACTION" ANALYTICAL CHEMISTRY, vol. 66, no. 17, 1 September 1994, pages 844 A-853 A, XP000466960 -----</p>	<p>1,11,19, 29,30, 36-40, 43,44, 46,47</p>

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 98/00235

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5565622 A	15-10-1996	DE 19525771 A JP 8094597 A	28-03-1996 12-04-1996
WO 9600614 A	11-01-1996	US 5700695 A AU 2955395 A EP 0767705 A	23-12-1997 25-01-1996 16-04-1997
GB 2211111 A	28-06-1989	JP 1143647 A	06-06-1989
WO 9115745 A	17-10-1991	AT 108018 T AU 654948 B AU 7574191 A CA 2079337 A DE 69102700 D DE 69102700 T DK 523092 T EP 0523092 A ES 2056644 T US 5691206 A	15-07-1994 01-12-1994 30-10-1991 03-10-1991 04-08-1994 12-01-1995 14-11-1994 20-01-1993 01-10-1994 25-11-1997

Form PCT/ISA/210 (patent family annex) (July 1992)